

INSULATED FIRE RATED ACCESS DOOR WITH DRYWALL BEAD

Model KRP-350FR

For Walls And Ceilings

DATE



KARP ASSOCIATES, INC. 260 Spagnoli Road Melville, NY 11747

(631) 768-8300 - Phone (631) 768-8350 - Fax

SPECIFICATIONS

GENERAL SCOPE:

The KRP-350FR is insulated and rated by Underwriters Laboratories for 1.5 hour "B" label in walls, and may be used in a 2 hour fire rated wall assembly. Additionaly, Warnock Hersey rated the KRP-350FR for 3 hours in ceilings.

CONSTRUCTION:

- 1. Frame shall be 16 gage steel, 1" wide, surrounded by galvanized drywall bead.
- 2. Door shall be 20 gage steel, welded pan type filled with 2" thick fire-rated insulation, and shall open to 175° , be self-latching with automatic closer and interior latch release.
- 3. Hinge shall be continuous piano hinge.
- 4. Latches shall be spring loaded sliding bolt type, keyed paddle latch, all keyed alike. Door can be prepared for a rim cylinder lock.
- 5. Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel. Stainless steel doors shall have #4 satin finish.
- * Fire rated insulation provides a noise reduction coeficent (NRC) of 1.0.

Project Name: Architect: Contractor: Agent/Customer Name:

PROJECT DATA

Tagging Instructions:

Special Instructions:

To be purchased from Industrial Hardware & Specialties, Inc. www.industrialhardware.com

T:973-684-4010 Fox:973-684-3095


PROJECT SCHEDULE							
Qty.	Н	w	No. of Latches	Finish	Remarks		

DDA IECT COLIEDIU E

STANDARD SIZES

DOOR SIZE	WALL/CEILING	NUMBER OF	SHIP WT.
H X W (IN.)	OPENING (IN.)	LATCHES	(LBS.)
8 x 8		1	6.1
12 x 12	8 3/8 x 8 3/8	1	9.3
14 x 14	12 3/8 x 12 3/8	1	12.2
16 x 16	14 3/8 x 14 3/8	1	13.6
18 x 18	16 3/8 x 16 3/8 18 3/8 x 18 3/8	1	18.2
24 x 12	24 3/8 x 12 3/8	1	14.9
22 x 22	22 3/8 x 22 3/8	1	23.5
24 x 24	24 3/8 x 24 3/8	1	25.7
30 x 22	30 3/8 x 22 3/8	1	26.8
30 x 24	30 3/8 x 24 3/8	1	31.0
30 x 30*	30 3/8 x 30 3/8	1	36.3
32 x 32*	32 3/8 x 32 3/8	1	39.8
36 x 22	36 3/8 x 22 3/8	2	33.1
36 x 24	36 3/8 x 24 3/8 36 3/8 x 36 3/8	2	38.7
36 x 36*	48 3/8 x 24 3/8	2	50.1
48 x 24*	48 3/8 x 36 3/8	2	47.1
48 x 36*	48 3/8 x 48 3/8	2	59.7
48 x 48*	,	2	85.7

*NOTE: All doors sized larger than 24" wide are for walls only. Not available for ceilings. 000000000 0 GAI VANIZED 0 ō DRYWALL BEAD 0 0 0 0 Α H + 2"0 0 0 ⁰Ф 0 0 0 0 0 0 Ф ⁰ W W + 2"

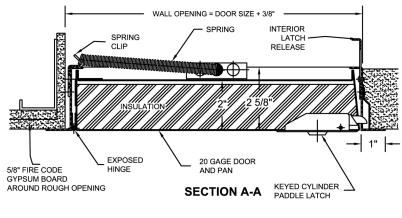



Made with Union Labor