


Key-Locking Solid Tappable Core

		REVISIONS			
ZONE	REV.	DESCRIPTION	DATE	APPROVED	



External Thread Pitch
5/16-18

Key

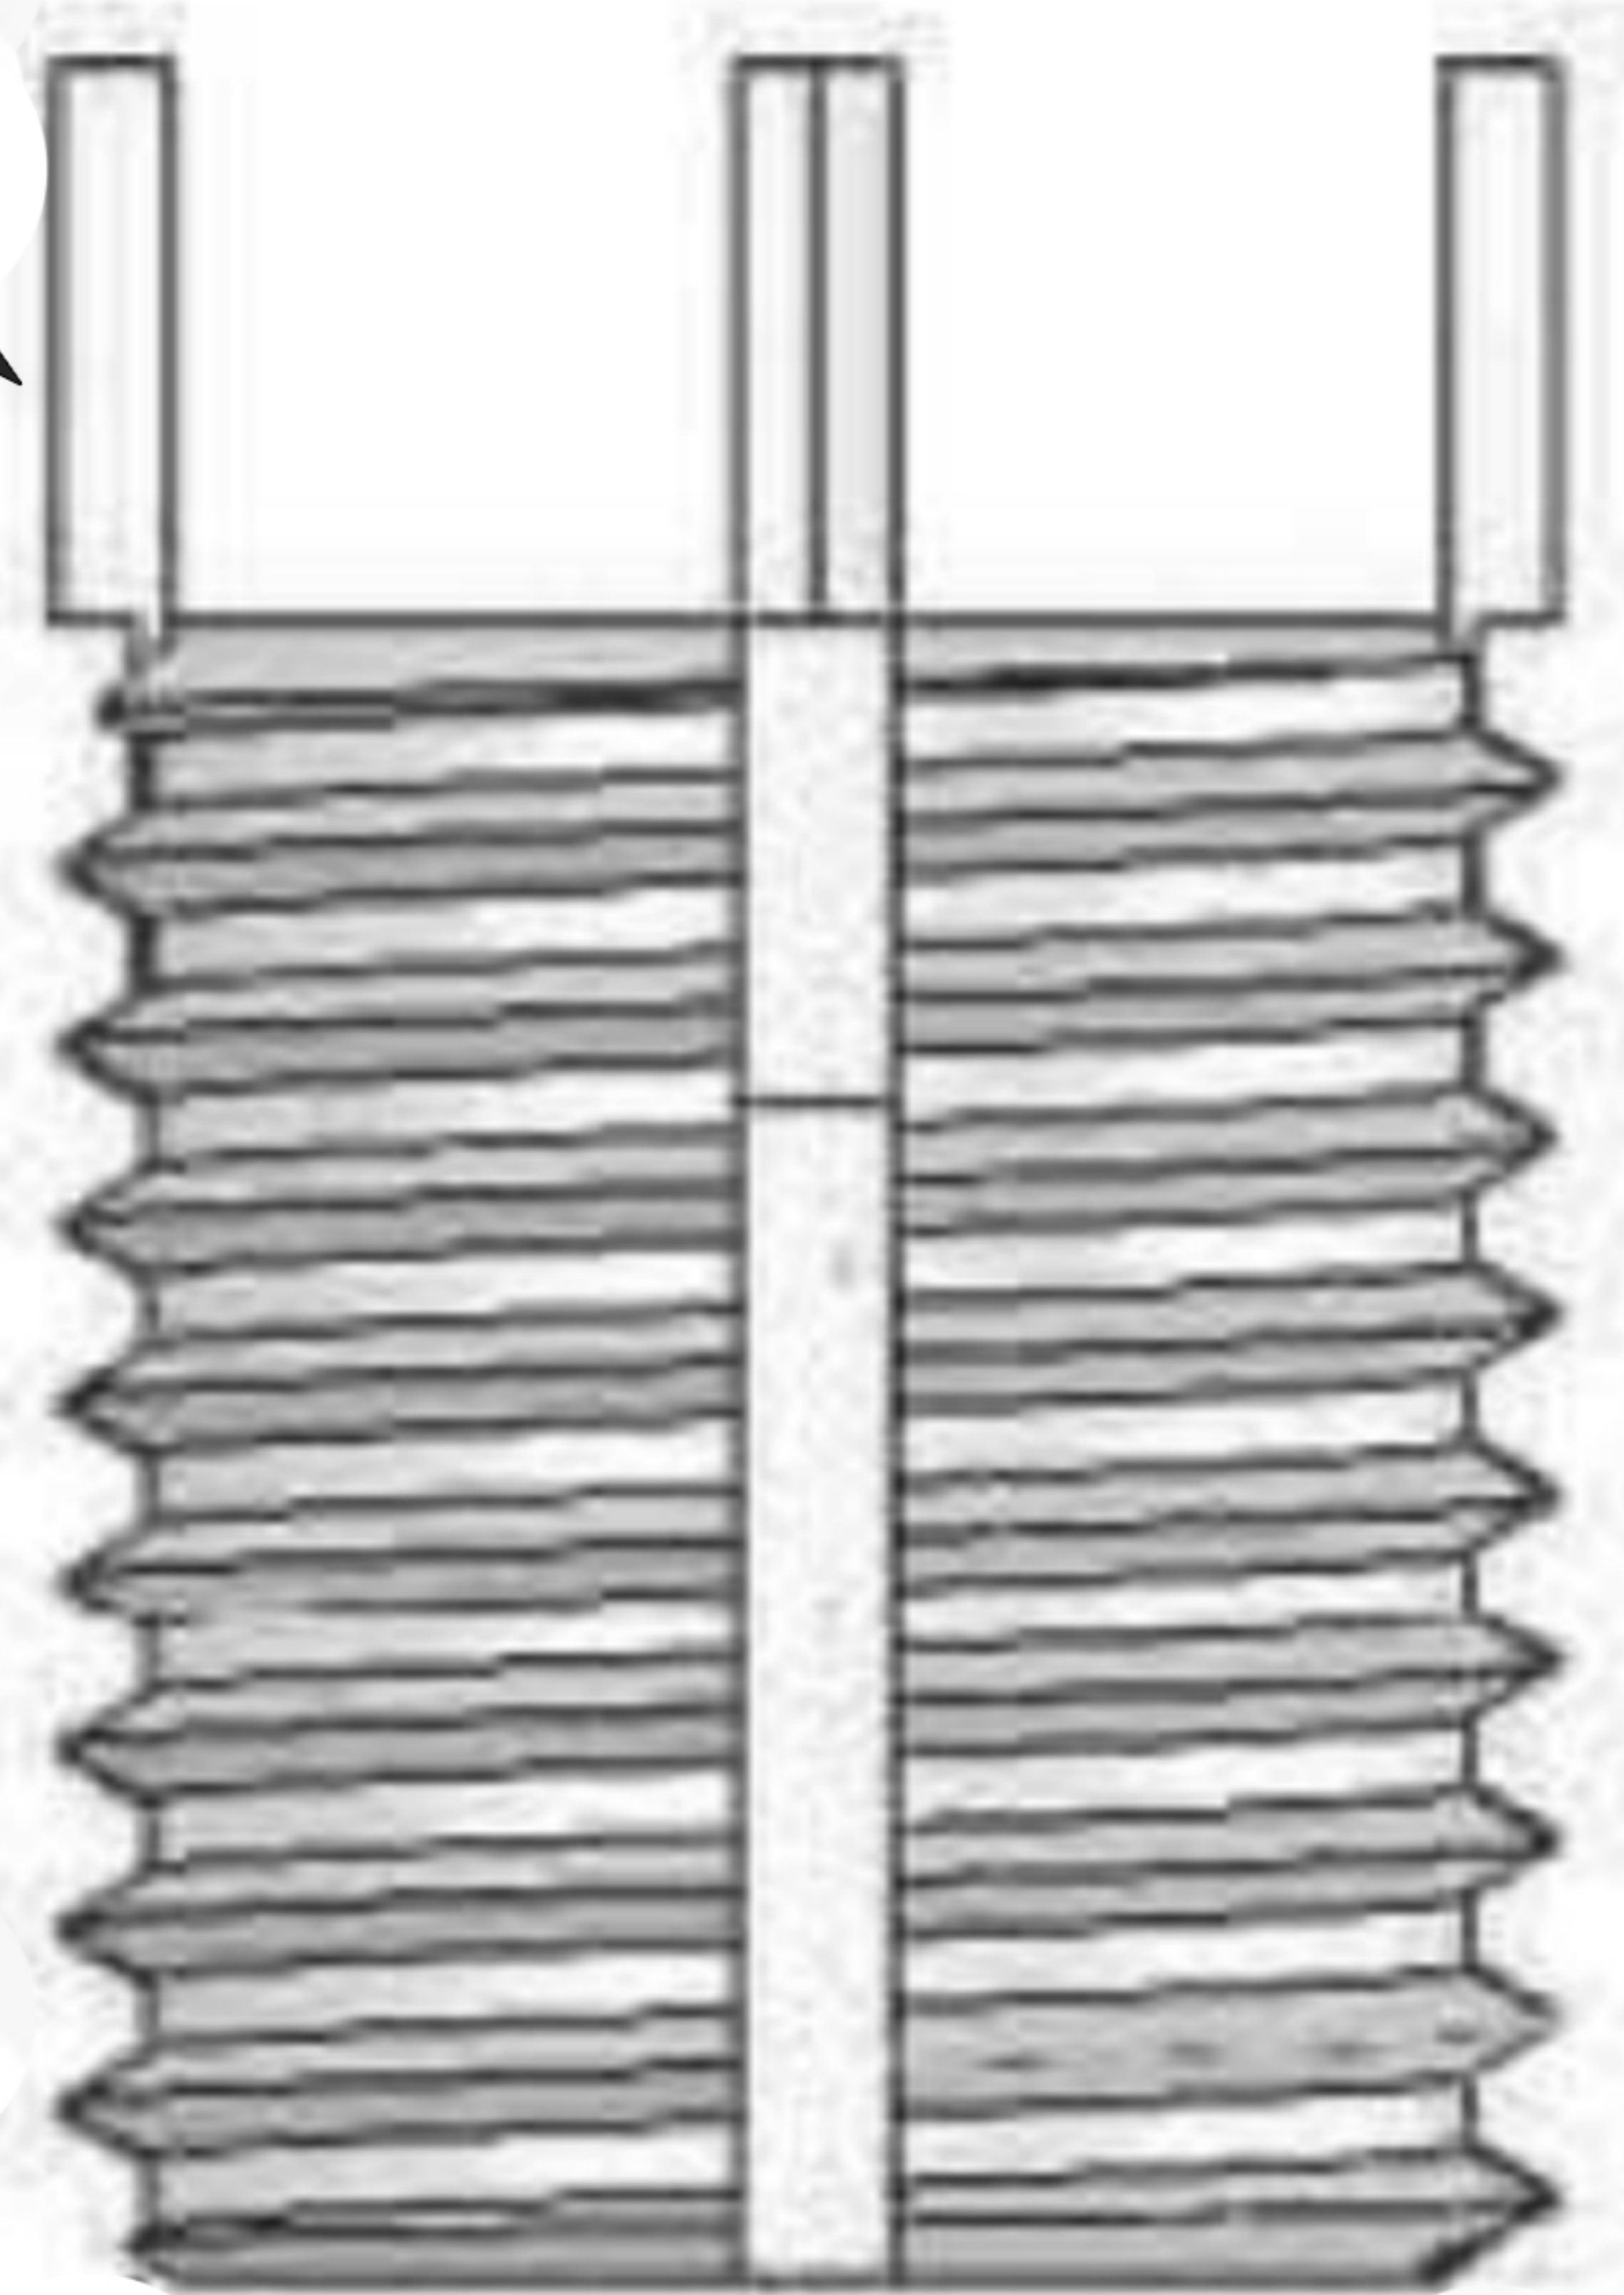

0.312

Suggested Drill Bit Size  0.2720 (Letter I)

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

				NAME	DATE
				DRAWN	
				CHECKED	
				ENG APPR.	
				MFG APPR.	
				Q.A.	
				COMMENTS:	
NEXT ASSY	USED ON	TH. STANDARD: ANSI/ASME ACRONYM: UNC ROTATION: Right-Hand MATERIAL FINISH Carbon Steel C1215 PART NUMBER 35L8C-4N02-031			
APPLICATION		DO NOT SCALE DRAWING			



**INDUSTRIAL
HARDWARE**
AND SPECIALTIES INCORPORATED

**17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com**

SIZE	DWG. NO.	REV.
A		
SCALE:1:8	WEIGHT:	SHEET 1 OF 1