



Alloy Bolt Type Anchor Shackles, Galvanized, A-999-G

- Shackle Bodies Are Drop-Forged Alloy Steel
- Galvanized to Meet ASTM A-153 Specifications
- A-999-G Shackles Meet the Design Requirements of Federal Specification RR-C-271, Type IVA Grade B, Class 3
- Working Load Limit, Size, Manufacture Name, Date Code, "CE" Mark, and USA Permanently Marked on Each Shackle
- Statistically Tested for Impact Resistance, Tensile Strength, Hardness, Ductility and Fatigue
- 999 Series Shackles Meet or Exceed All Manufacturing Requirements of the ASME B30.26 "Rigging Hardware". These Include the Material Ductility Requirement (Section 26-1.1.2), the Design Factor Requirement (Section 26.1.2), the Identification Requirement (Section 26-1.5.1), and the Effective Temperature Range (Section 26-1.6.1). the Shackles Can Be Proof Tested in Accordance with Section 26-1.4
- Certification Available Upon Request
- 5 to 1 Design Factor
- Pins and Bolts Are Heat-Treated, Made of Alloy Steel and Painted Orange
- DO NOT EXCEED THE WORKING LOAD LIMIT




FITTINGS

| Trade Size | Catalog No. | UPC No. 020418 | Working Load Limit (Metric Tons) | B Dim. | C Dim. | D Dim. | E Dim. | F Dim. | (C) Tolerance (+/-) | (D) Tolerance (+/-) | Weight Each |
|------------|-------------|----------------|----------------------------------|----------|------------|------------|------------|------------|---------------------|---------------------|-------------|
| 3/8 in | 5390695 | 267338 | 2 t | 7/16 in | 1-7/16 in | 21/32 in | 31/32 in | 15/16 in | 1/8 in | 1/8 in | 0.30 lb |
| 1/2 in | 5390895 | 182198 | 3-1/3 t | 5/8 in | 1-15/16 in | 13/16 in | 1-1/4 in | 1-1/4 in | 1/8 in | 1/8 in | 0.88 lb |
| 5/8 in | 5391095 | 267345 | 5 t | 3/4 in | 2-3/8 in | 1-1/16 in | 1-11/16 in | 1-1/2 in | 1/8 in | 1/8 in | 1.40 lb |
| 3/4 in | 5391295 | 182105 | 7 t | 7/8 in | 2-13/16 in | 1-1/4 in | 1-13/16 in | 1-3/4 in | 1/4 in | 1/8 in | 2.66 lb |
| 7/8 in | 5391495 | 267352 | 9-1/2 t | 1 in | 3-5/16 in | 1-7/16 in | 2-9/32 in | 2-3/32 in | 1/4 in | 1/8 in | 3.60 lb |
| 1 in | 5391695 | 182112 | 12-1/2 t | 1-1/8 in | 3-3/4 in | 1-11/16 in | 2-1/2 in | 2-3/8 in | 1/4 in | 1/8 in | 6.12 lb |
| 1-1/4 in | 5392095 | 267369 | 18 t | 1-3/8 in | 4-1/2 in | 2 in | 3-1/4 in | 3 in | 1/4 in | 1/8 in | 10.00 lb |
| 1-3/8 in | 5392295 | 267376 | 21 t | 1-1/2 in | 5-1/4 in | 2-1/4 in | 3-5/8 in | 3-5/16 in | 1/4 in | 3/16 in | 13.30 lb |
| 1-1/2 in | 5392495 | 267383 | 30 t | 1-5/8 in | 5-3/4 in | 2-3/8 in | 3-7/8 in | 3-5/8 in | 1/4 in | 3/16 in | 18.90 lb |
| 1-3/4 in | 5392895 | 267390 | 40 t | 2 in | 7 in | 2-7/8 in | 4-7/8 in | 4-3/16 in | 1/4 in | 3/16 in | 33.90 lb |
| 2 in | 5393295 | 267406 | 55 t | 2-1/4 in | 7-3/4 in | 3-1/4 in | 5-3/4 in | 4-7/8 in | 1/2 in | 3/16 in | 50.00 lb |
| 2-1/2 in | 5394095 | 267413 | 85 t | 2-3/4 in | 10-1/2 in | 4-1/8 in | 7-1/4 in | 5-13/16 in | 1/2 in | 1/4 in | 100.30 lb |

Stainless Steel Bolt Type Anchor Shackles, ST-999-V

- Forged Type 316 Stainless Steel
- Electro-Polish Finish
- Imported
- DO NOT EXCEED THE WORKING LOAD LIMIT

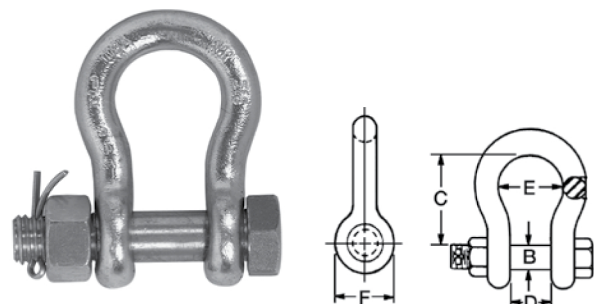

| Trade Size | Catalog No. | UPC No. 020418 | Working Load Limit (Short Tons) | B Dim. | C Dim. | D Dim. | E Dim. | F Dim. | (C) Tolerance (+/-) | (D) Tolerance (+/-) | Weight Each |
|------------|-------------|----------------|---------------------------------|---------|------------|-----------|-----------|-----------|---------------------|---------------------|-------------|
| 3/8 in | 6402406 | 093869 | 3/4 T | 7/16 in | 1-7/16 in | 21/32 in | 31/32 in | 15/16 in | 1/8 in | 1/8 in | 0.31 lb |
| 1/2 in | 6402408 | 093883 | 1-1/2 T | 5/8 in | 1-15/16 in | 13/16 in | 1-1/4 in | 1-1/4 in | 1/8 in | 1/8 in | 0.72 lb |
| 5/8 in | 6402410 | 093890 | 2 T | 3/4 in | 2-7/16 in | 1-1/16 in | 1-9/16 in | 1-7/16 in | 1/8 in | 1/8 in | 1.38 lb |