


## ROOF HATCH - Diamond Series TM - ROOF HATCH, DIAMOND SERIES 30 X 96 I ALUM, MILL FINISH

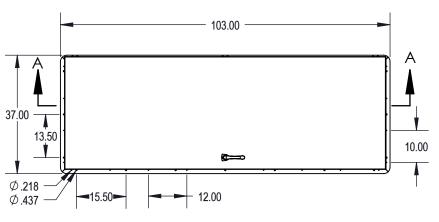



## B 3.50 2.38 96.00 LENGTH SECTION A-A SCALE 1: 30



## SPECIFICATIONS:

- 1. Curb: 11 gauge mill finish aluminum single wall curb and counterflashing with Diamond Grip.
- 2. Cover: 11 gauge aluminum formed, welded cover with 18 gauge liner, tested to support a live load of 40psf.
- 3. Finish: Mill Finish.
- Gasket: Continuous, weatherproof EPDM sponge rubber adhesive-backed seal.
- 5. Insulation: 1" polyisocyanurate in curb and cover with thermal resistance R-6.
- 6. Spring: Counterbalanced compression springs contained in clear zinc-plated steel cylinders.
- 7. Latch: Clear zinc-plated steel slam latch with inside and outside handles and padlock hasps.
- 8. Hold Open Arm: Clear zinc-plated automatic locking hold open arm with red vinyl grip for one handed door operation.
- 9. Hinge: Heavy duty clear zinc-plated steel pintle hinge.

Notes:

For pitched roofs up to 7:12, mount hinge side parallel to slope. Door opens 75  $^\circ$ 

Clear Opening: 19" X 90"

Weight: 133lbs

Diamond Series<sup>™</sup> is a trademark of Activar Construction Products Group Inc.

MODEL #: RHDA-3





9702 Newton Ave S. Bloomington, MN 55431 | 10 Locations Nationwide

800-554-6077 
952-835-2218 sales@activarcpg.com www.activarcp

	Da
og.com	So

Distributor:			Project:	
Contractor:			Approved By:	
Date:	Quantity:		Architect:	
Scale:	Pages:	1 OF 1	Drawing #:	RHDA-3-SUBMITTAL_B