



ROOF HATCH - Diamond Series TM - ROOF HATCH, DIAMOND SERIES 36 X 36 (RHG-4) I GALV STEEL, WHITE TEXTURED

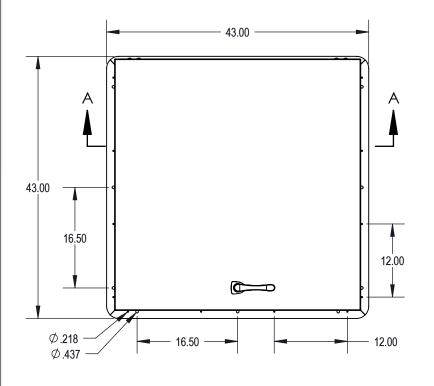

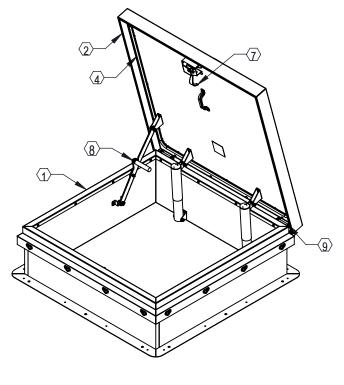

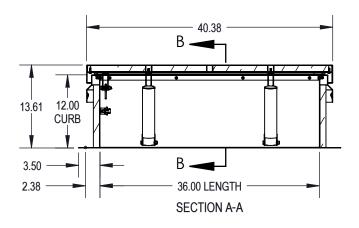

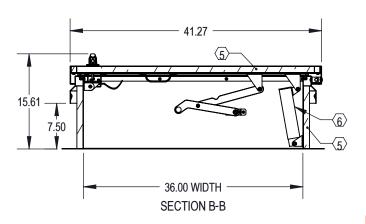

SPECIFICATIONS:

- 1. Curb: 14 gauge galvannealed steel single wall curb and counterflashing with Diamond Grip.
- 2. Cover: 14 gauge galvannealed steel formed, welded cover with 22 gauge liner, tested to support a live load of 40psf.
- 3. Finish: White, textured powder coat paint.
- 4. Gasket: Continuous, weatherproof EPDM sponge rubber adhesive-backed seal.
- 5. Insulation: 1" polyisocyanurate in curb and cover with thermal resistance R-6.
- 6. Spring: Counterbalanced compression springs contained in clear zinc-plated steel cylinders.
- 7. Latch: Clear zinc-plated steel slam latch with inside and outside handles and padlock hasps. Tested to 50psf wind uplift.
- 8. Hold Open Arm: Clear zinc-plated automatic locking hold open arm with red vinyl grip for one handed door operation.
- 9. Hinge: Heavy duty clear zinc-plated steel pintle hinge.

Notes:

For pitched roofs up to 7:12, mount hinge side parallel to slope. Door opens 75°

Clear Opening: 25" X 30" Weight: 162lbs

Diamond Series[™] is a trademark of ACPG.

MODEL #: RHDG-4WT





9702 Newton Ave S. Bloomington, MN 55431 | 10 Locations Nationwide 800-554-6077 📮 952-835-2218 🔀 sales@activarcpg.com

(www	.activa	rcpg.	con
-	\Box	www	.activa	rcpg.	COI

	Distributor:		Project:	
	Contractor:		Approved By:	
Date: Quantity:		Quantity:	Architect:	
	Scale: 1:16	Pages: 1 OF 1	Drawing #:	RHDG-4WT-SUBMITTAL_A