SUBMITTAL: SAF-T-HATCH™ SAFETY RAIL FOR ROOF OPENINGS

The Saf-T-Hatch Railing can be installed on any manufacturer's roof Hatch. This Patented railing system features a clamping frame that is assembled around the curb base of roof hatch or skylight. This railing does not penetrate the curb or the roof deck - it is designed to protect your roof warranty. Meet OSHA required compliance for safe egress and ingress through all of your rooftop hatch openings while hatch is in use. Complies with OSHA CFR 29 -1910.23 and CFR 29 - 1910.27. SHWC-3036 In Stock at One

SPECIFICATIONS:

Pipe Rail: 1.66" O.D. galvannealed steel tubing. **Tubing Base**: 2" x 2" 16 gauge galvannealed steel. **Tubing Base Pad:** Styrofoam 3/4" thick isolated pad.

Finish: Safety yellow powder coat paint finish

Hardware: Zinc plated threaded rods, caps, nuts, bolts and washers. Chain: Zinc plated 3/16" ASTM proof coil with hoop and rings as required

Pipe Caps: Plastic inserts, black.

Installation: Quickly installs by a clamping frame around curb base of roof hatch or fire hatch. Does not penetrate the roof deck or require "approved" installer. Fits all brands of existing roof hatches with cap flashing - field adjustable to fit flashing size.

STEP 1 - ENTER QUANTITY AND SELECT MODEL ON PAGE 2 STEP 2 - SELECT OPTIONAL FEATURES AT ADDITIONAL COST:

SHG-2436 Steel Gate Option: fits roof hatches with opening size from 24" to 36".

-GRAB: Optional Welded Grab Bar for Models Narrower than 36" (Standard on Models with 36" or greater opening)

Integrated RHG Steel Roof Hatch with Permanent Rail Supports - See Separate Submittal- See Model RHG-STH.

PAGE 1 OF 2



SHWC 3036 RAILING WITH STANDARD ZINC-PLATED CHAIN



SHG-2436 OPTIONAL GATE—SEE SEPARATE SUBMITTAL FOR DETAILS





Distributor:	Quantity:
Contractor:	Approved By:
Model #:	Architect:
Project:	Date: © 2017 Activar Construction Products Group, Inc

or More of Our Warehouses!


SUBMITTAL: SAF-T-HATCH™ SAFETY RAIL FOR ROOF OPENINGS

PAGE 2 OF 2


Qty	Model Please note new part #	Curb Opening Railing Egress Side	Curb Opening	Approx Weight	Fits ACPG Roof Hatch Model	Includes Grab Bar
	SHWC-3036	30"	36"	66 lbs	RHA/RHG/RHR-1	N
	SHWC-3054	30"	54"	70 lbs	RHA/RHG-2	N
	SHWC-3096	30"	96"	80 lbs	RHA/RHG-3	N
	SHWC-3636*	36"	36"	68 lbs	RHA/RHG-4	Y
	SHWC-4848*	48"	48"	75 lbs	RHA/RHG-5	Y (2)

NEW STANDARD SIZES NOW AVAILABLE BELOW!

Qty	Model	Curb Opening Railing Egress Side	Curb Opening	Approx Weight	Fits Roof Hatch with Outside Curb Dimensions Length x Width	Includes Grab Bar
	SHWC-2424	24"	24"	55 lbs	26" x 26" Min 30" x 30" Max	N
	SHWC-2430	24"	30"	60 lbs	26" x 32" Min 30" x 36" Max	N
	SHWC-2436	24"	36"	60 lbs	26" x 38"Min 30" x 42" Max	N
	SHWC-2496	24"	96"	75 lbs	26" x 98" Min 30" x 102 Max	N
	SHWC-3030	30"	30"	65 lbs	32" x 32" Min 36" x 36" Max	N
	SHWC-3648*	36"	48"	70 lbs	38" x 50" Min 42" x 54" Max	Υ
	SHWC-3696*	36"	96"	90 lbs	38" x 98" Min 42" x 102" Max	Y



SHWC-3636 SHOWN WITH STANDARD GRAB BAR (Standard with 36" and Greater Egress)

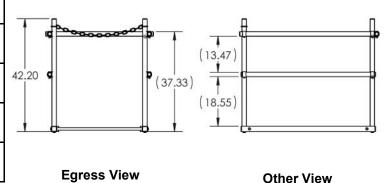

CUSTOM SIZES AVAILABLE UPON REQUEST:

Outside Curb Dimension Egress Side: ______Outside Curb Dimension Other Side: _____

Please attach drawing and clearly indicate egress side and location of stair or ladder.

Contact Customer Service for Custom Requests.

 $[\]hbox{* Models that include grab bar } \verb|SHWC-3636|, \verb|SHWC-4848|, \verb|SHWC-3648|, \verb|SHWC-3696||\\$