


ANGLE


CHANNEL FITTINGS

2 HOLE OPEN ANGLE

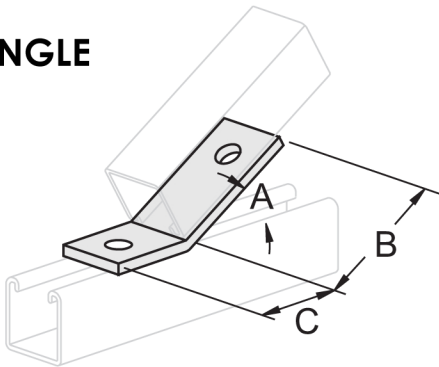


| P/N | A | B | C | CTN. QTY. | LBS/100 |
|--------|-----|---------|---------|--------------|---------|
| 467615 | 15° | 3-5/16" | 2-1/16" | 25 | 54 |
| 467630 | 30° | 3-5/16" | | | |
| 467645 | 45° | 3-1/4" | 2-5/16" | | |
| 467660 | 60° | 3-1/4" | 2-3/8" | | |

4 HOLE OPEN ANGLE

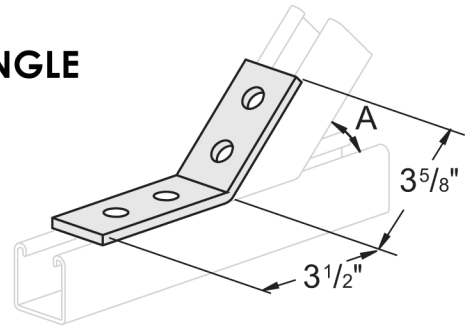


| P/N | A | CTN. QTY. | LBS/100 |
|--------|-----|--------------|---------|
| 467915 | 15° | 25 | 70 |
| 467930 | 30° | | |
| 467945 | 45° | | |
| 467960 | 60° | | |
| 467967 | 67° | | |
| 467975 | 75° | | |

2 HOLE CLOSED ANGLE

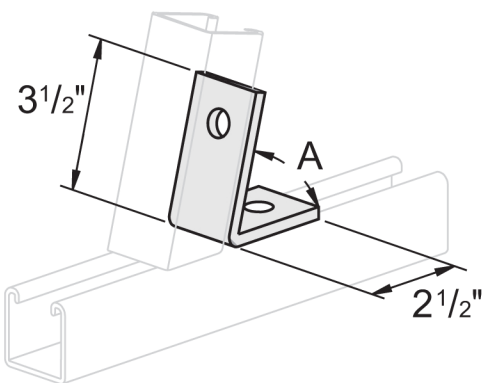

| P/N | A | CTN. QTY. | LBS/100 |
|--------|-----|--------------|---------|
| 467745 | 45° | 25 | 53 |
| 467760 | 60° | | |

4 HOLE CLOSED ANGLE

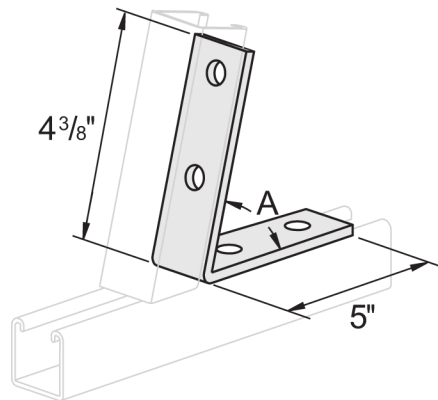

| P/N | A | CTN. QTY. | LBS/100 |
|--------|-----|--------------|---------|
| 467845 | 45° | 20 | 88 |
| 467860 | 60° | | |

UNLESS SPECIFIED, MATERIAL IS 1-5/8" WIDE. HOLES ARE 9/16" DIAMETER, 13/16" CENTER TO EDGE, & SPACED 1-7/8" ON CENTER.
STANDARD FINISH - EG ALSO AVAILABLE: STAINLESS STEEL & HOT DIPPED GALVANIZED

1.13