


W I N G

CHANNEL FITTINGS


**4 HOLE
L. H.
GUSSETED
SINGLE
CORNER**

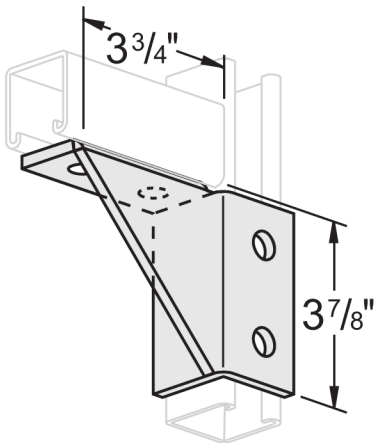

4750L

10/CTN
176 LBS/100


**4 HOLE
R. H.
GUSSETED
SINGLE
CORNER**

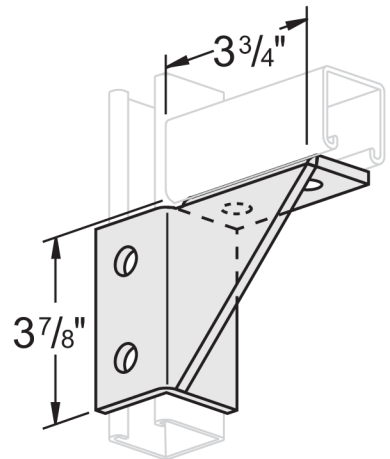

4750R

10/CTN
176 LBS/100


**8 HOLE
GUSSETED
DOUBLE
CORNER**

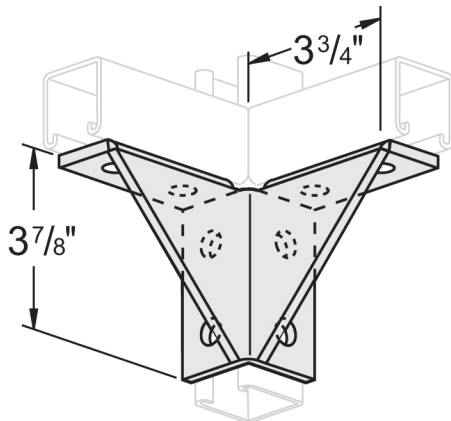

4751

10/CTN
217 LBS/100


**8 HOLE
GUSSETED
DOUBLE
CORNER**

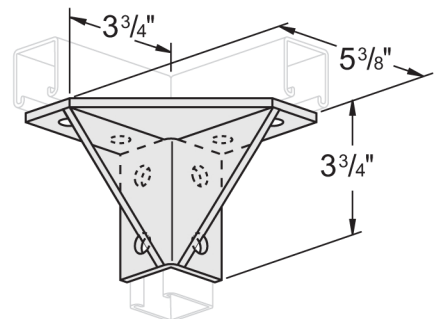

4752

5/CTN
315 LBS/100


**10 HOLE
GUSSETED
DOUBLE
CONNECTION**

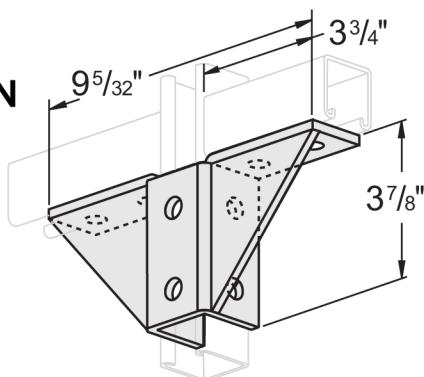

4753

5/CTN
285 LBS/100

**12 HOLE
GUSSETED
TRIPLE
CONNECTION**

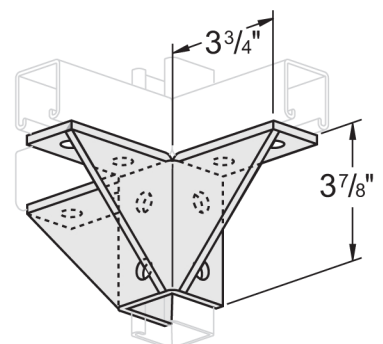

4754

5/CTN
330 LBS/100

UNLESS SPECIFIED, MATERIAL IS 1-5/8" WIDE. HOLES ARE 9/16" DIAMETER, 13/16" CENTER TO EDGE, & SPACED 1-7/8" ON CENTER.
STANDARD FINISH - EG ALSO AVAILABLE: STAINLESS STEEL & HOT DIPPED GALVANIZED

1.13