# PlastiSert Press-Fit Flanged Bottom Slot

| ZONE | REV. | REVISIONS DESCRIPTION | DATE | APPROVED |
|---|---|---|---|---|
| | | | | |
| | | | | |

Diameter Thread Pitch

1/4-20

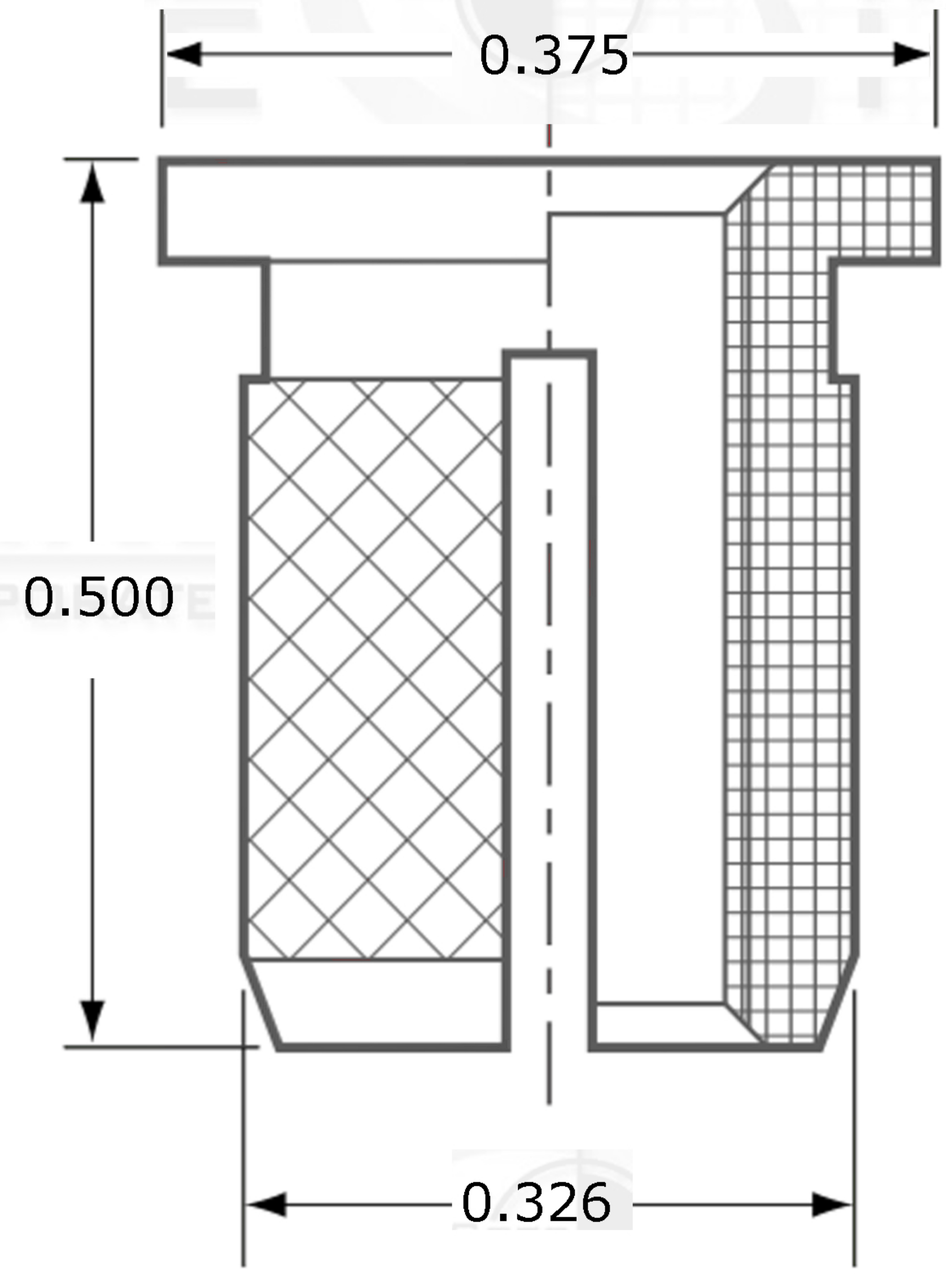


Suggested Drill Bit Size

0.3125 (5/16)


**PROPRIETARY AND CONFIDENTIAL**

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.


| | | |
|---|---|---|
| NEXT ASSY | USED ON | |
| APPLICATION | | DO NOT SCALE DRAWING |

TH. STANDARD: ANSI/ASME
ACRONYM: UNC
ROTATION: Right-Hand

MATERIAL FINISH
Stainless Steel Type 303

PART NUMBER
35L5C-JAXU-25-05

| | NAME | DATE |
|---|---|---|
| DRAWN | | |
| CHECKED | | |
| ENG APPR. | | |
| MFG APPR. | | |
| Q.A. | | |

COMMENTS:


INDUSTRIAL HARDWARE AND SPECIALTIES INCORPORATED

**17-B KENTUCKY AVENUE**
**PATERSON, NEW JERSEY 07503**
**TEL: 973-684-4010 FAX: 973-684-3095**
**email: TechSupport@industrialhardware.com**
**www.industrialhardware.com**


| SIZE | DWG. NO. | REV. |
|---|---|---|
| A | | |
| SCALE:1:8 | WEIGHT: | SHEET 1 OF 1 |