

# PlastiSert Press-Fit Flush Bottom Slot

ZONE	REV.	REVISIONS DESCRIPTION	DATE	APPROVED

INSPEC

Diameter Thread Pitch


2-56



0.156

0.125

0.135

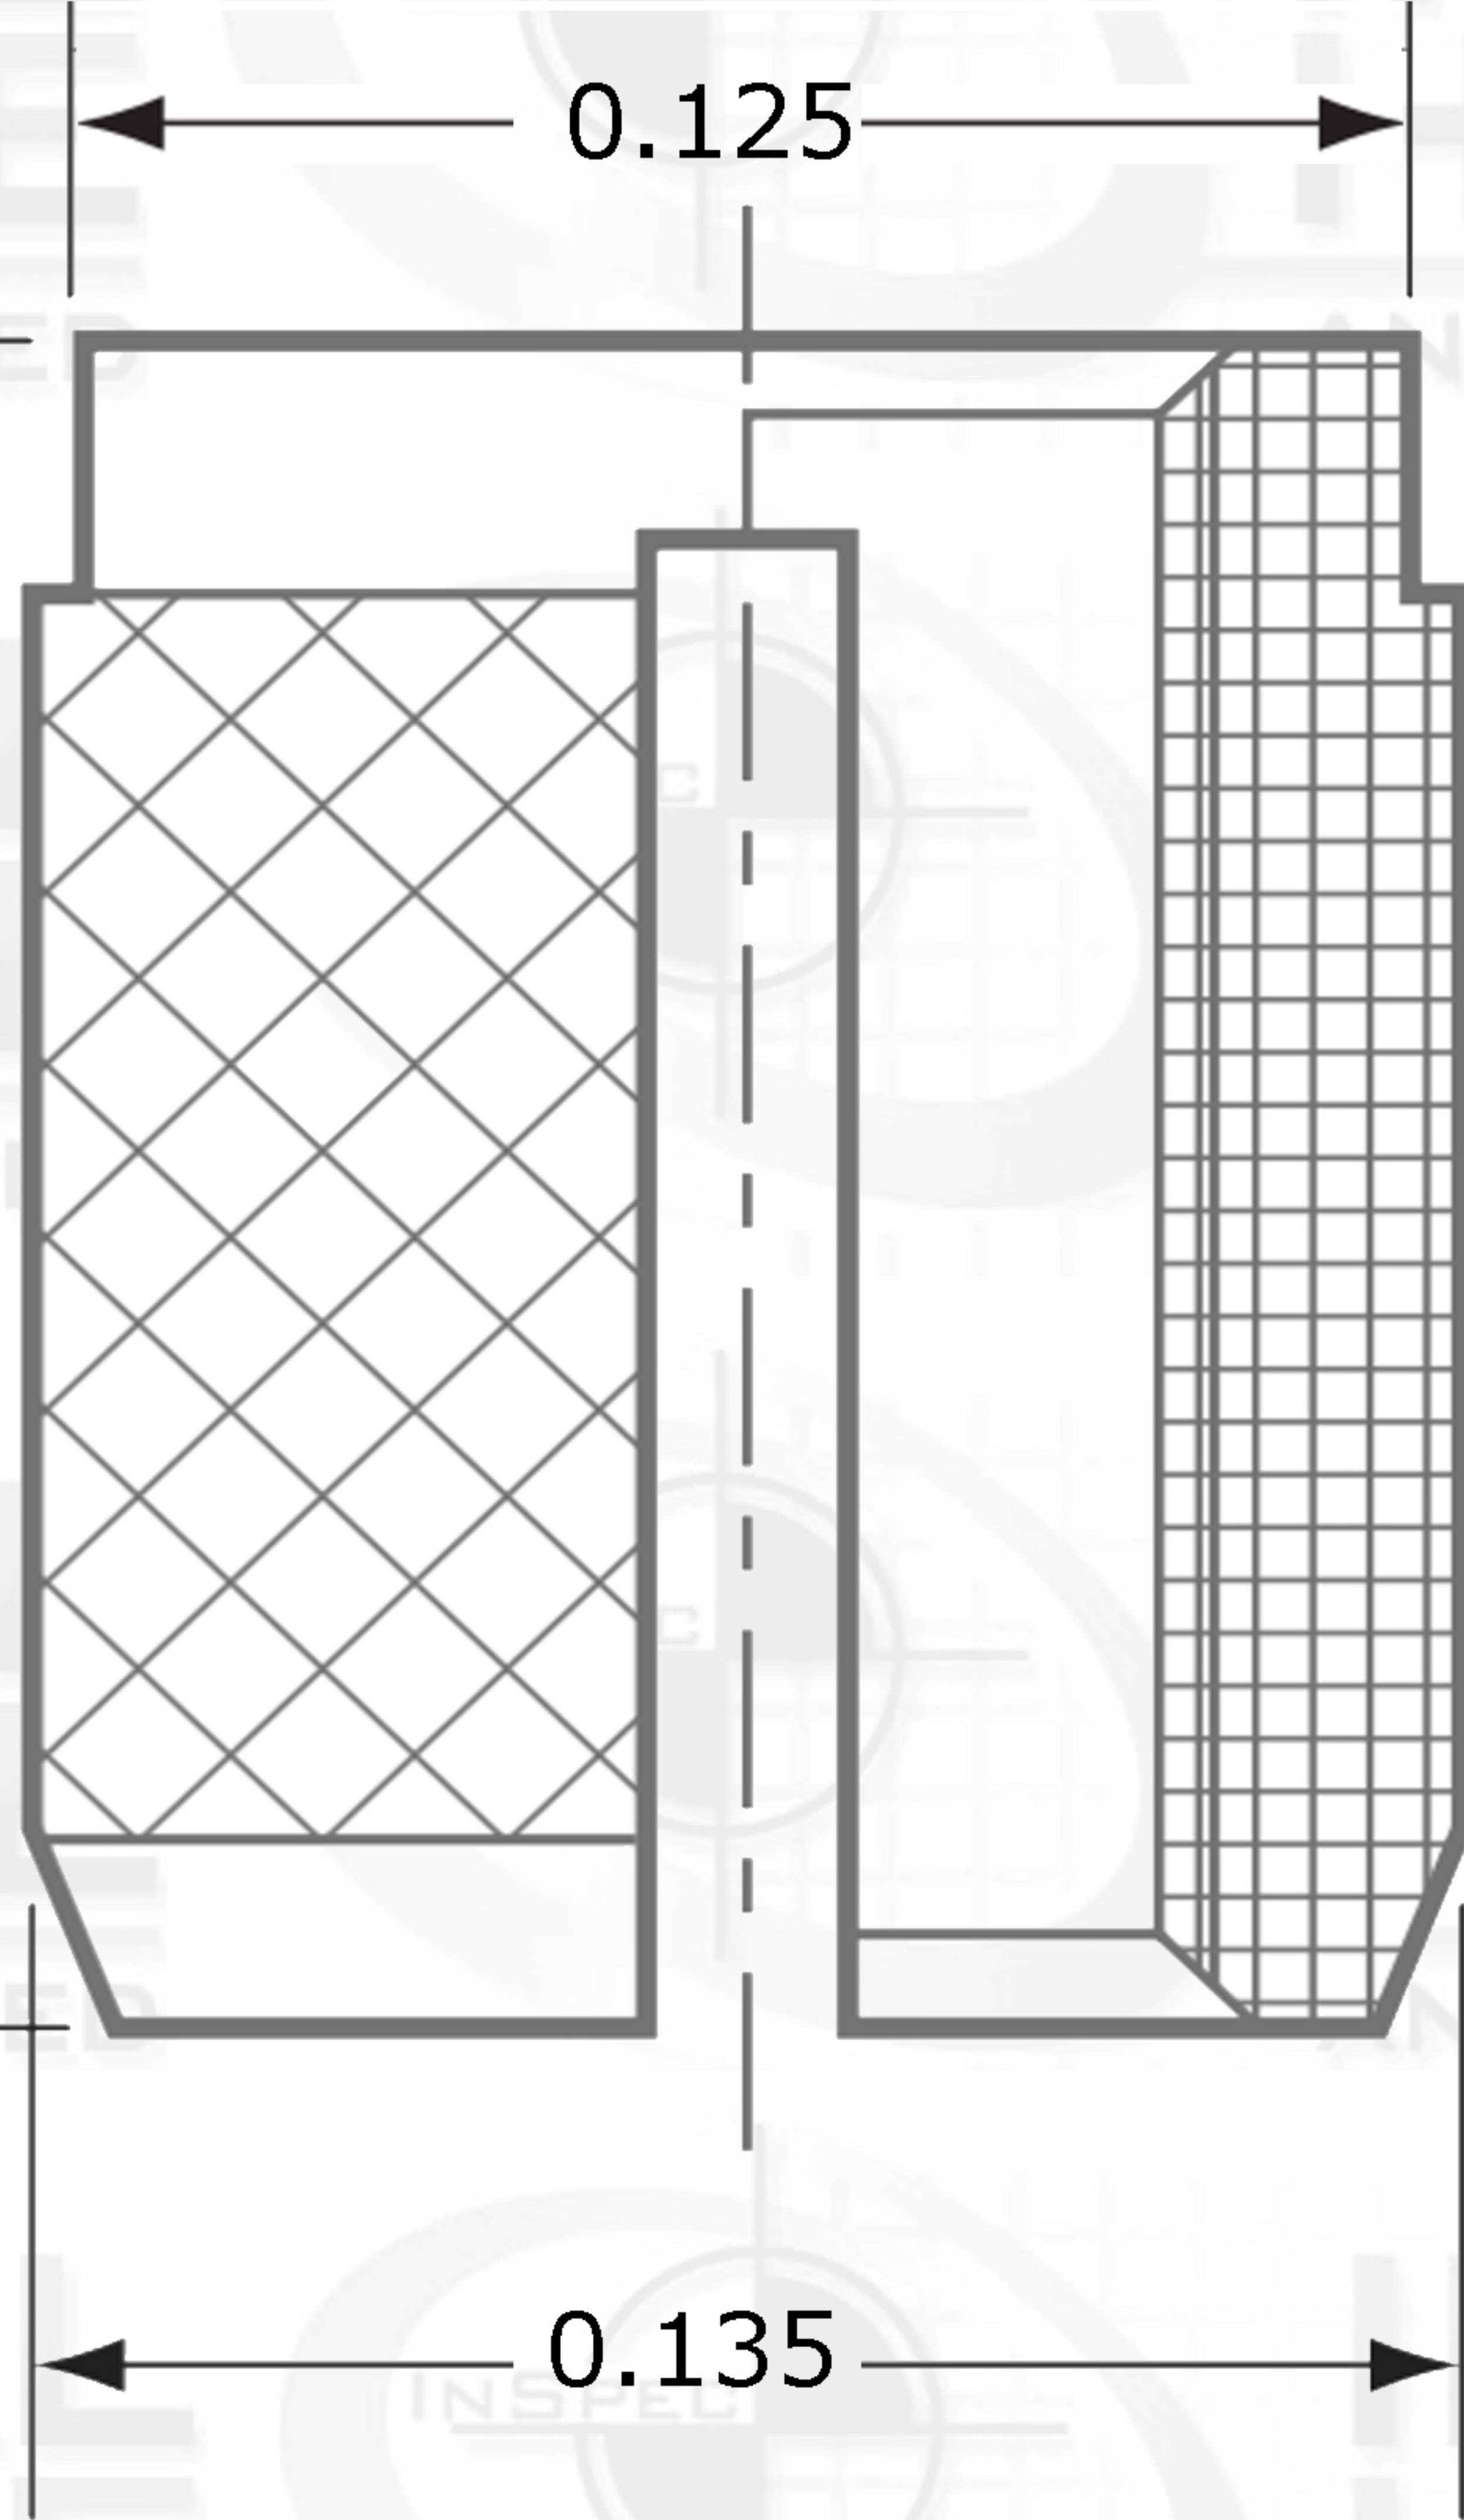

Suggested Drill Bit Size

0.1250 (1/8)



## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

			NAME	DATE
			DRAWN	
			CHECKED	
			ENG APPR.	
			MFG APPR.	
			Q.A.	
		COMMENTS:		
TH. STANDARD: ANSI/ASME				
ACRONYM:UNC				
ROTATION:Right-Hand				
MATERIAL FINISH				
Stainless Steel Type 303				
PART NUMBER				
35L5C-KVRA-02-0A				
NEXT ASSY	USED ON			
APPLICATION	DO NOT SCALE DRAWING			



**17-B KENTUCKY AVENUE  
PATERSON, NEW JERSEY 07503  
TEL: 973-684-4010 FAX: 973-684-3095  
email: TechSupport@industrialhardware.com  
www.industrialhardware.com**

SIZE	DWG. NO.	REV.
<b>A</b>		
SCALE:1:8	WEIGHT:	SHEET 1 OF 1