


WireSert Free-Running

Diameter Thread Pitch

5/8-18

Tang

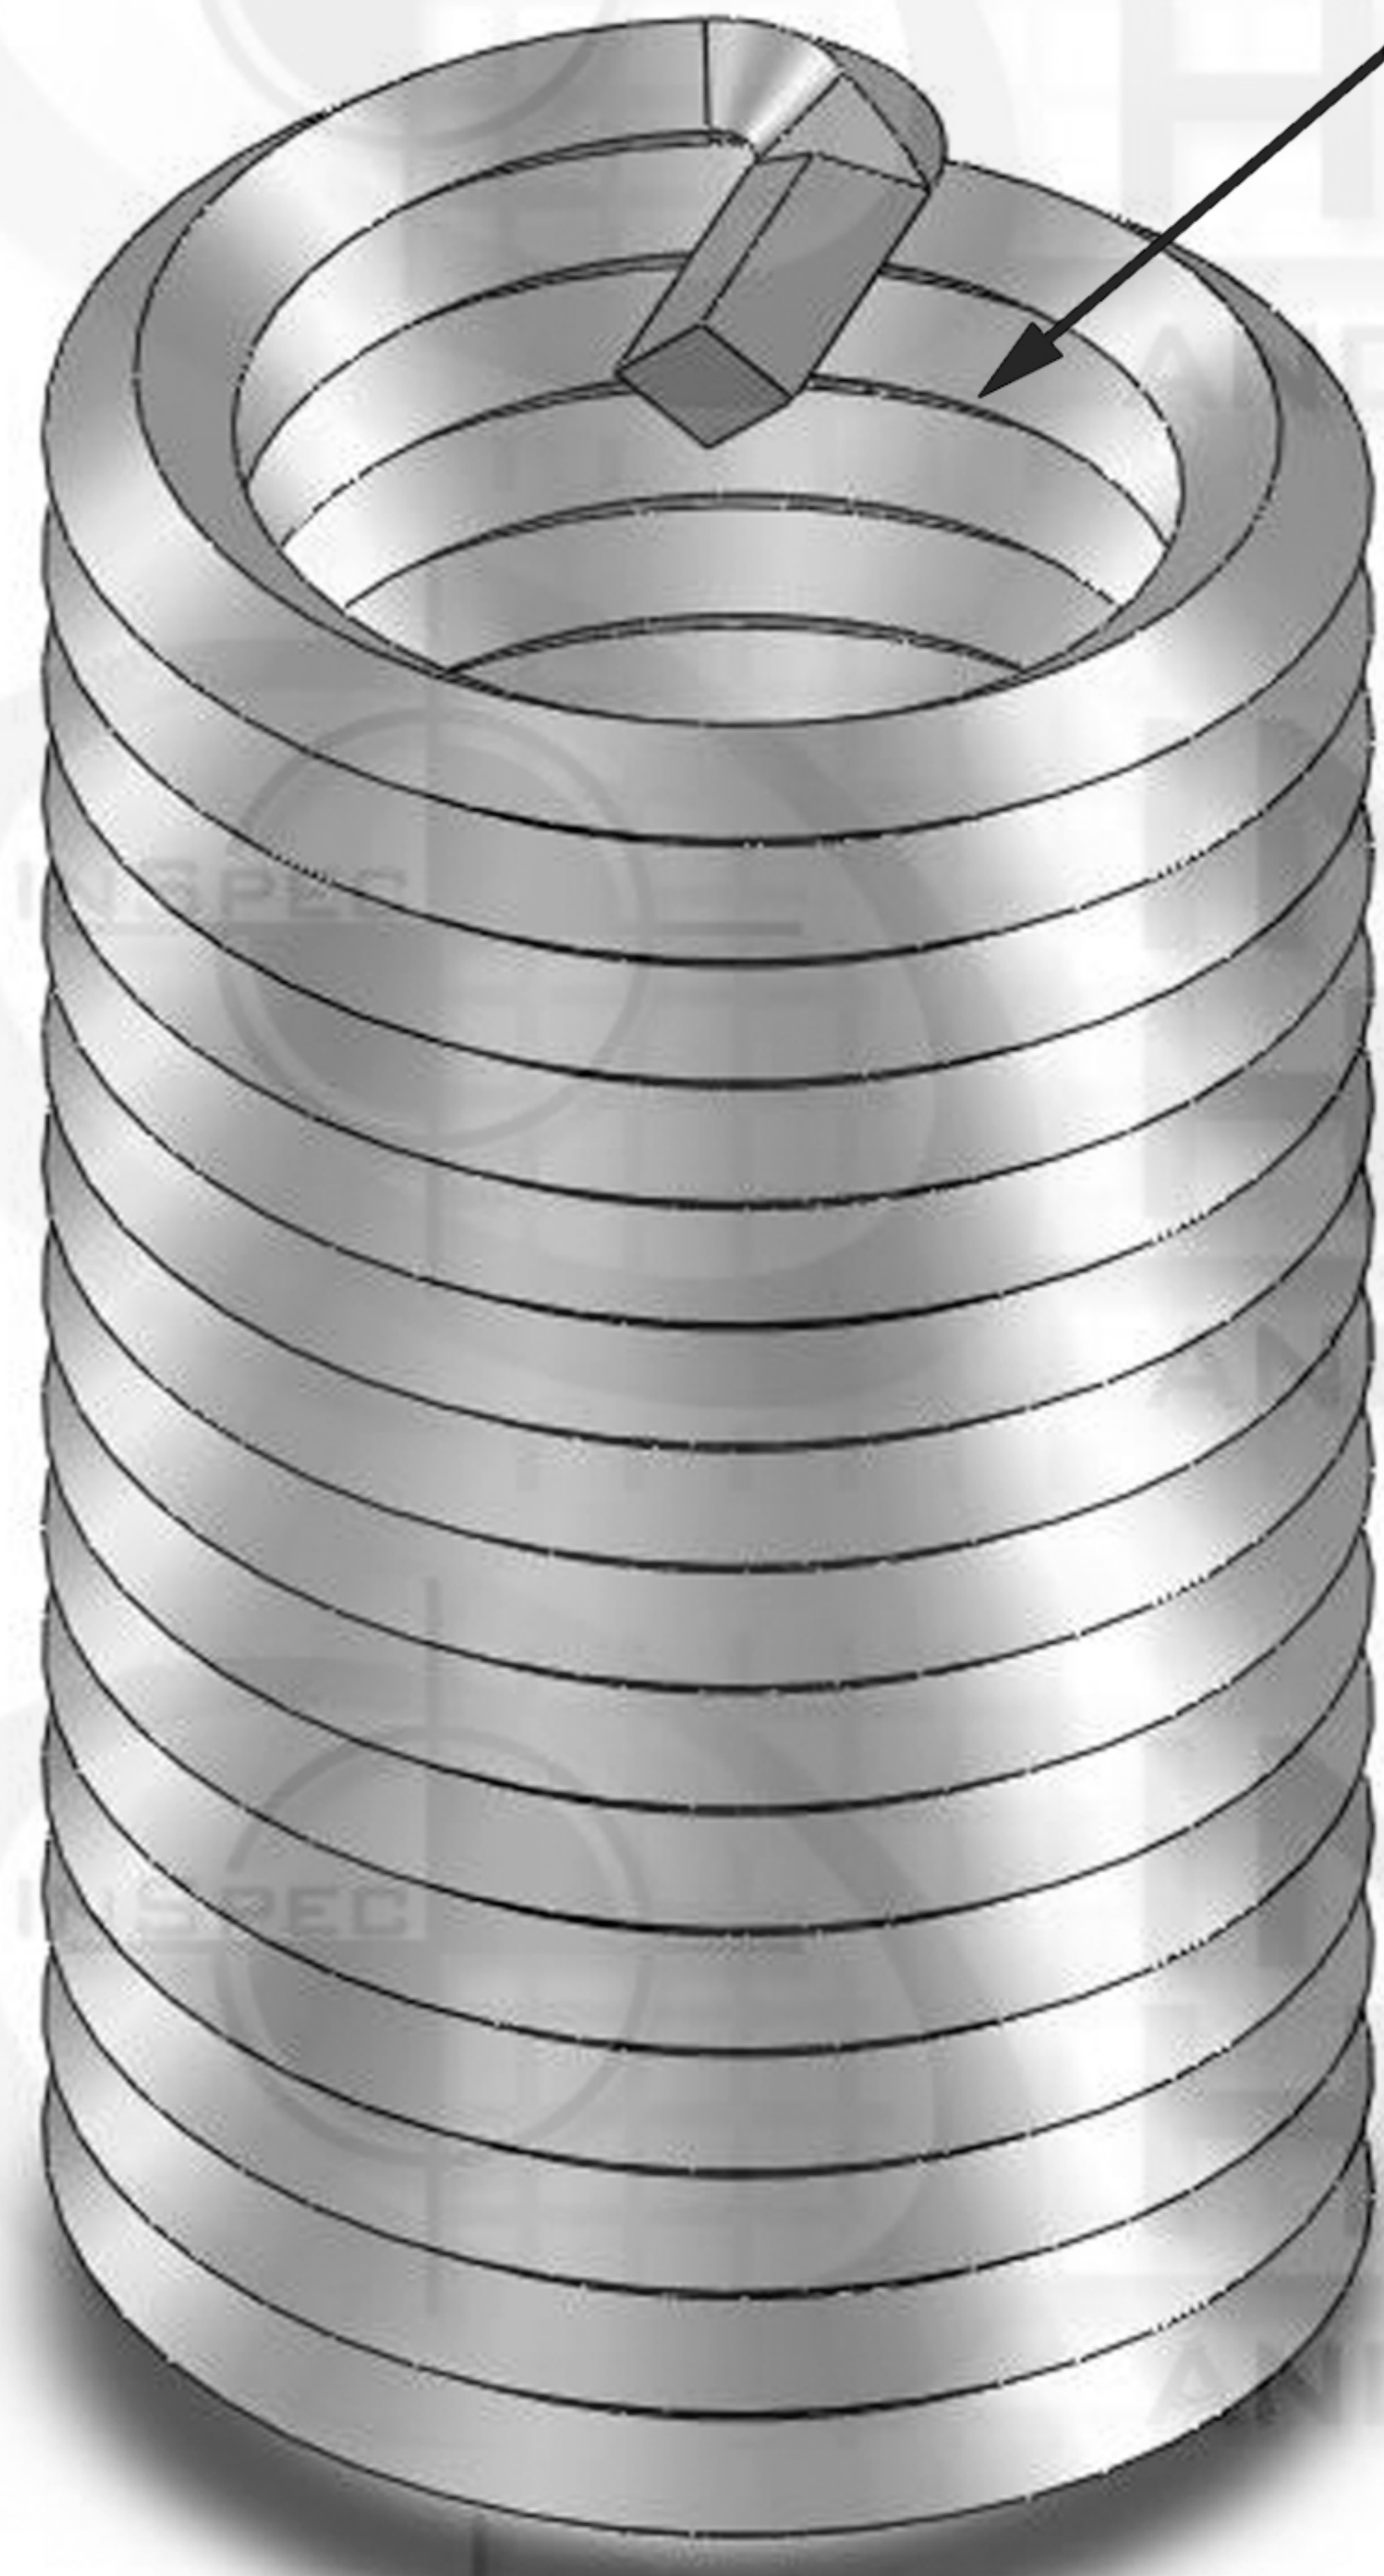

0.938

Suggested Drill Bit Size 0.6406 (41/64)

ZONE	REV.	REVISIONS	DATE	APPROVED
		DESCRIPTION		

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND ITS CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES, INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES, INC. IS STRICTLY PROHIBITED.

					NAME	DATE
					DRAWN	
					CHECKED	
					ENG APPR.	
					MFG APPR.	
					Q.A.	
					COMMENTS:	



17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com

NEXT ASSY	USED ON	TH. STANDARD: ANSI/ASME
		ACRONYM: UNF
		ROTATION: Left-Hand
		MATERIAL FINISH
		Stainless Steel 18-8
APPLICATION		PART NUMBER
		35L7C-C854-062-02
		DO NOT SCALE DRAWING

SIZE	DWG. NO.	REV.
A		
SCALE: 1:8	WEIGHT: 0.04	SHEET 1 OF 1