


WireSert Locking

Diameter Thread Pitch

1-1/8-7

Tang

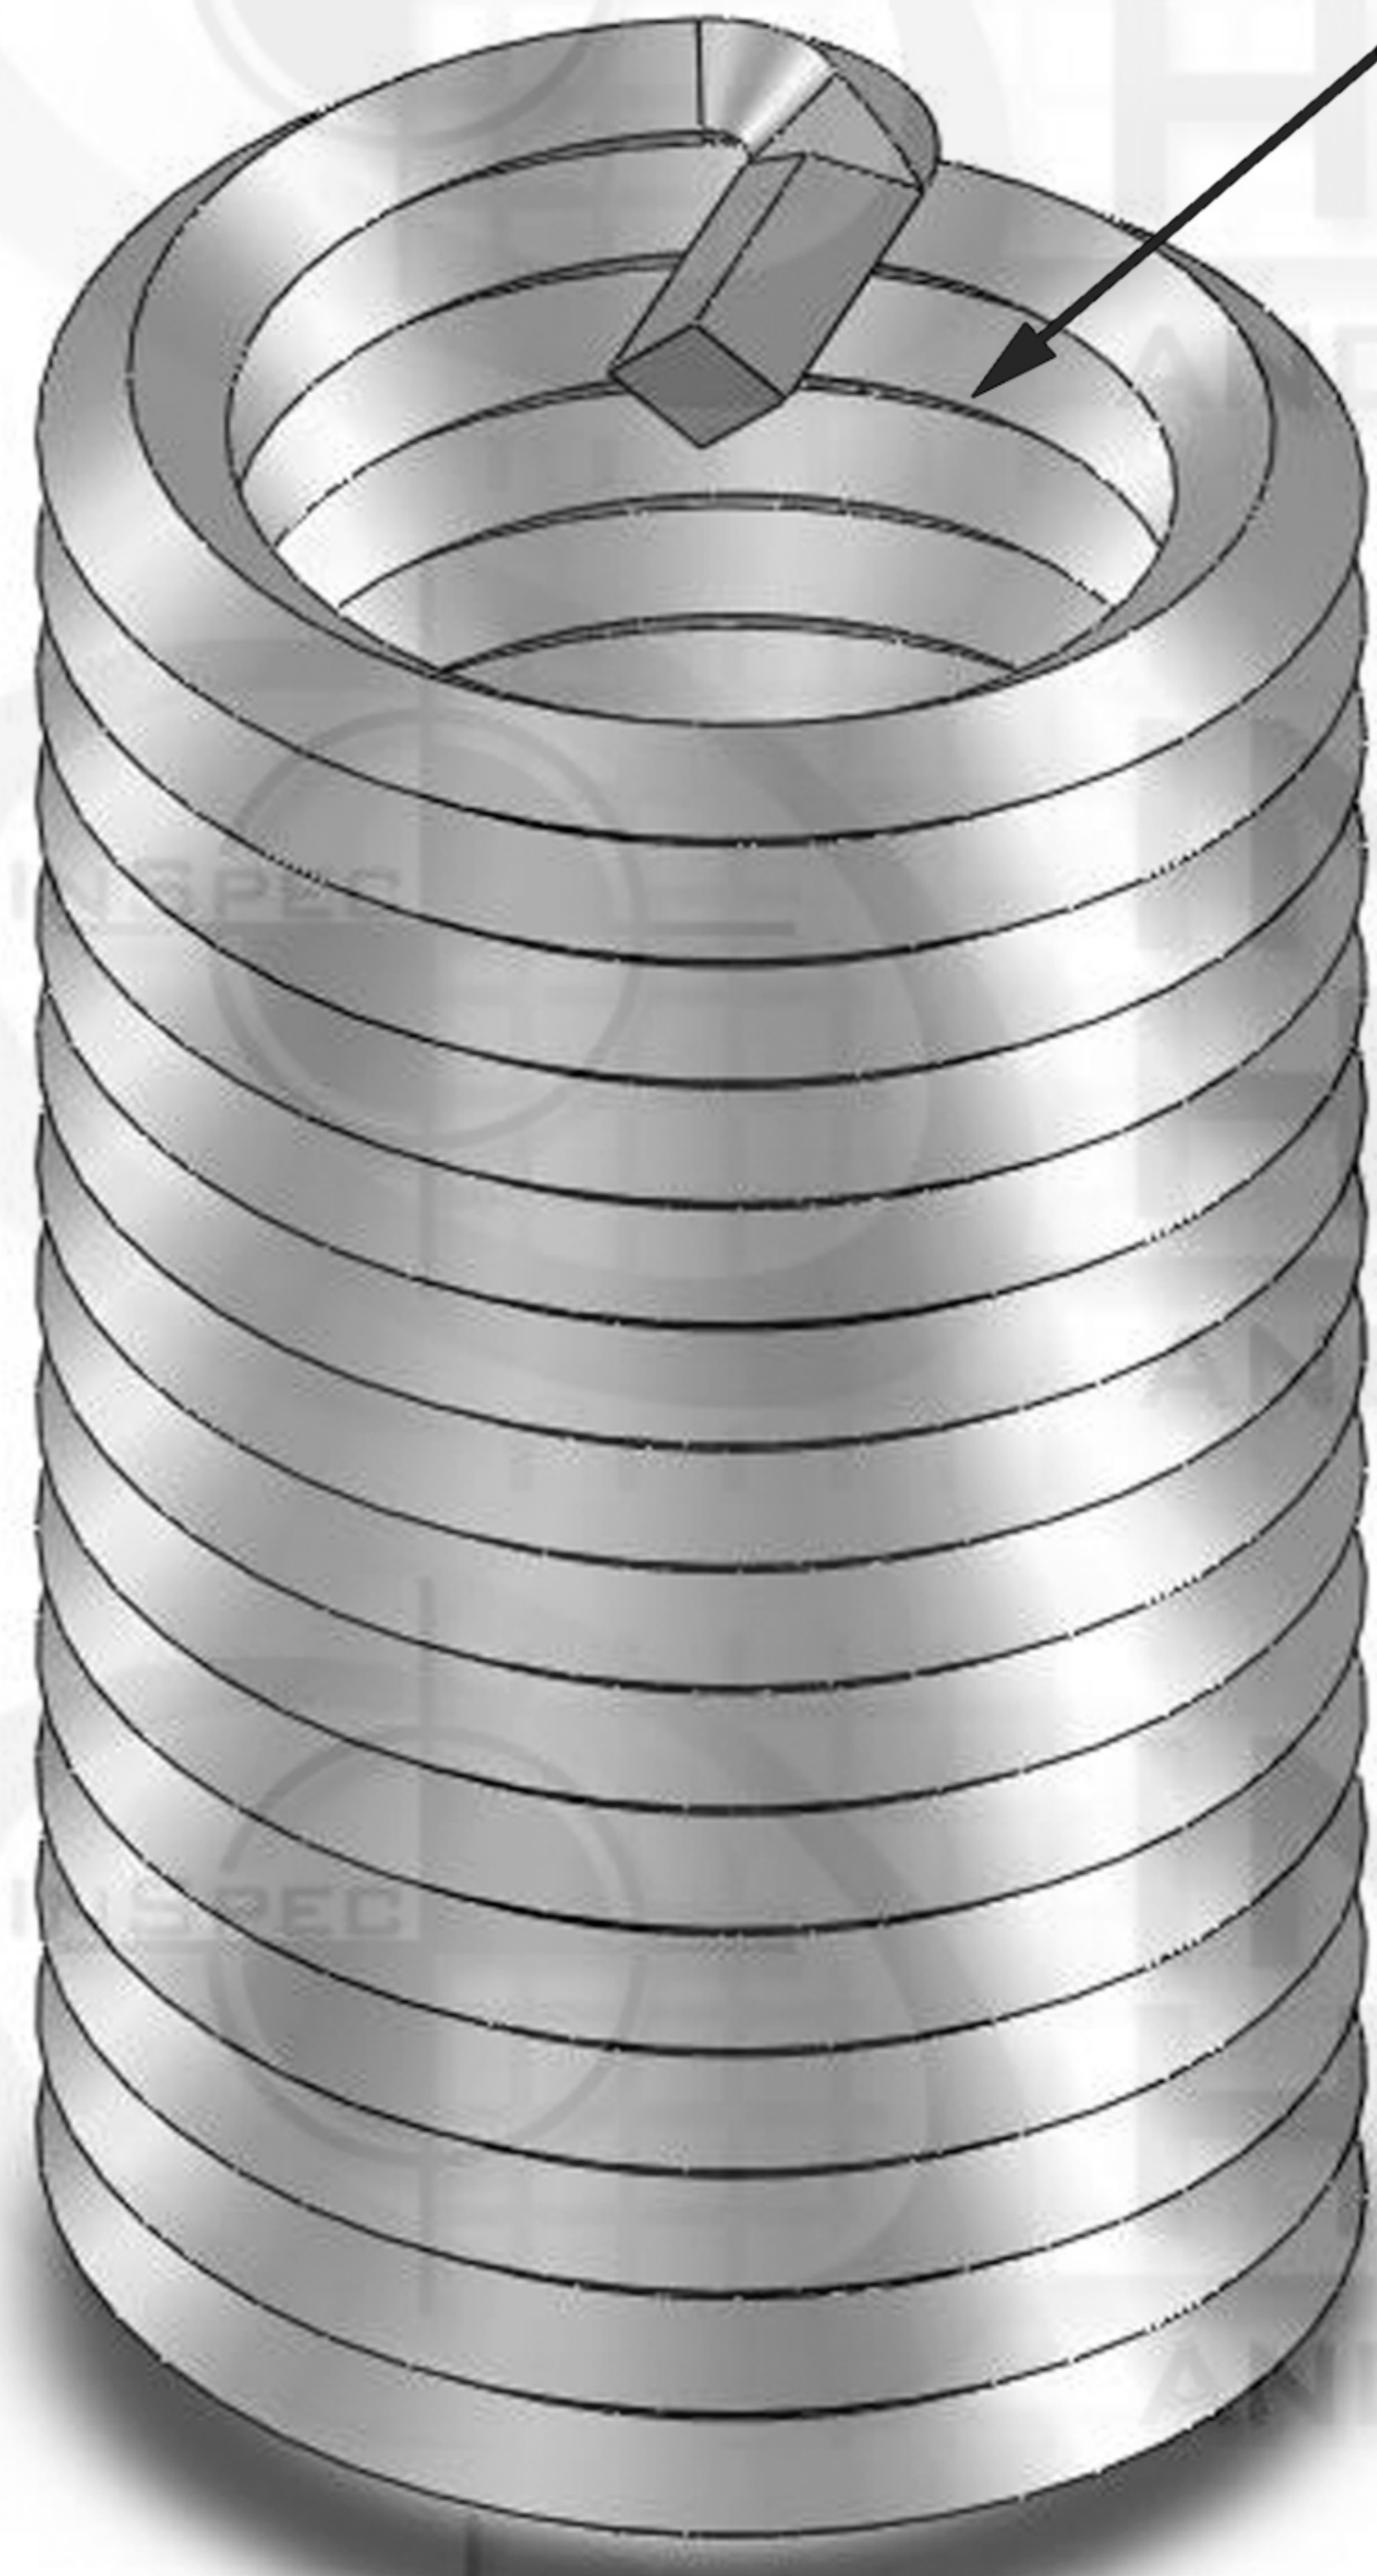

2.812

Suggested Drill Bit Size 1.1563 (1-5/32)



ZONE		REV.	REVISIONS DESCRIPTION	DATE	APPROVED

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

		MILITARY STANDARD MS21209-C1825	DRAWN	NAME	DATE
			CHECKED		
			ENG APPR.		
		TH. STANDARD: ANSI/ASME ACRONYM: UNC ROTATION: Right-Hand MATERIAL FINISH Stainless Steel 18-8	MFG APPR.		
			Q.A.		
NEXT ASSY	USED ON	PART NUMBER 35L7C-C8JJ-11225-05	COMMENTS:		
APPLICATION		DO NOT SCALE DRAWING			



INDUSTRIAL HARDWARE
AND SPECIALTIES INCORPORATED

17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com

SIZE	DWG. NO.	REV.
A		

SCALE: 1:8 WEIGHT: 1.11 SHEET 1 OF 1