
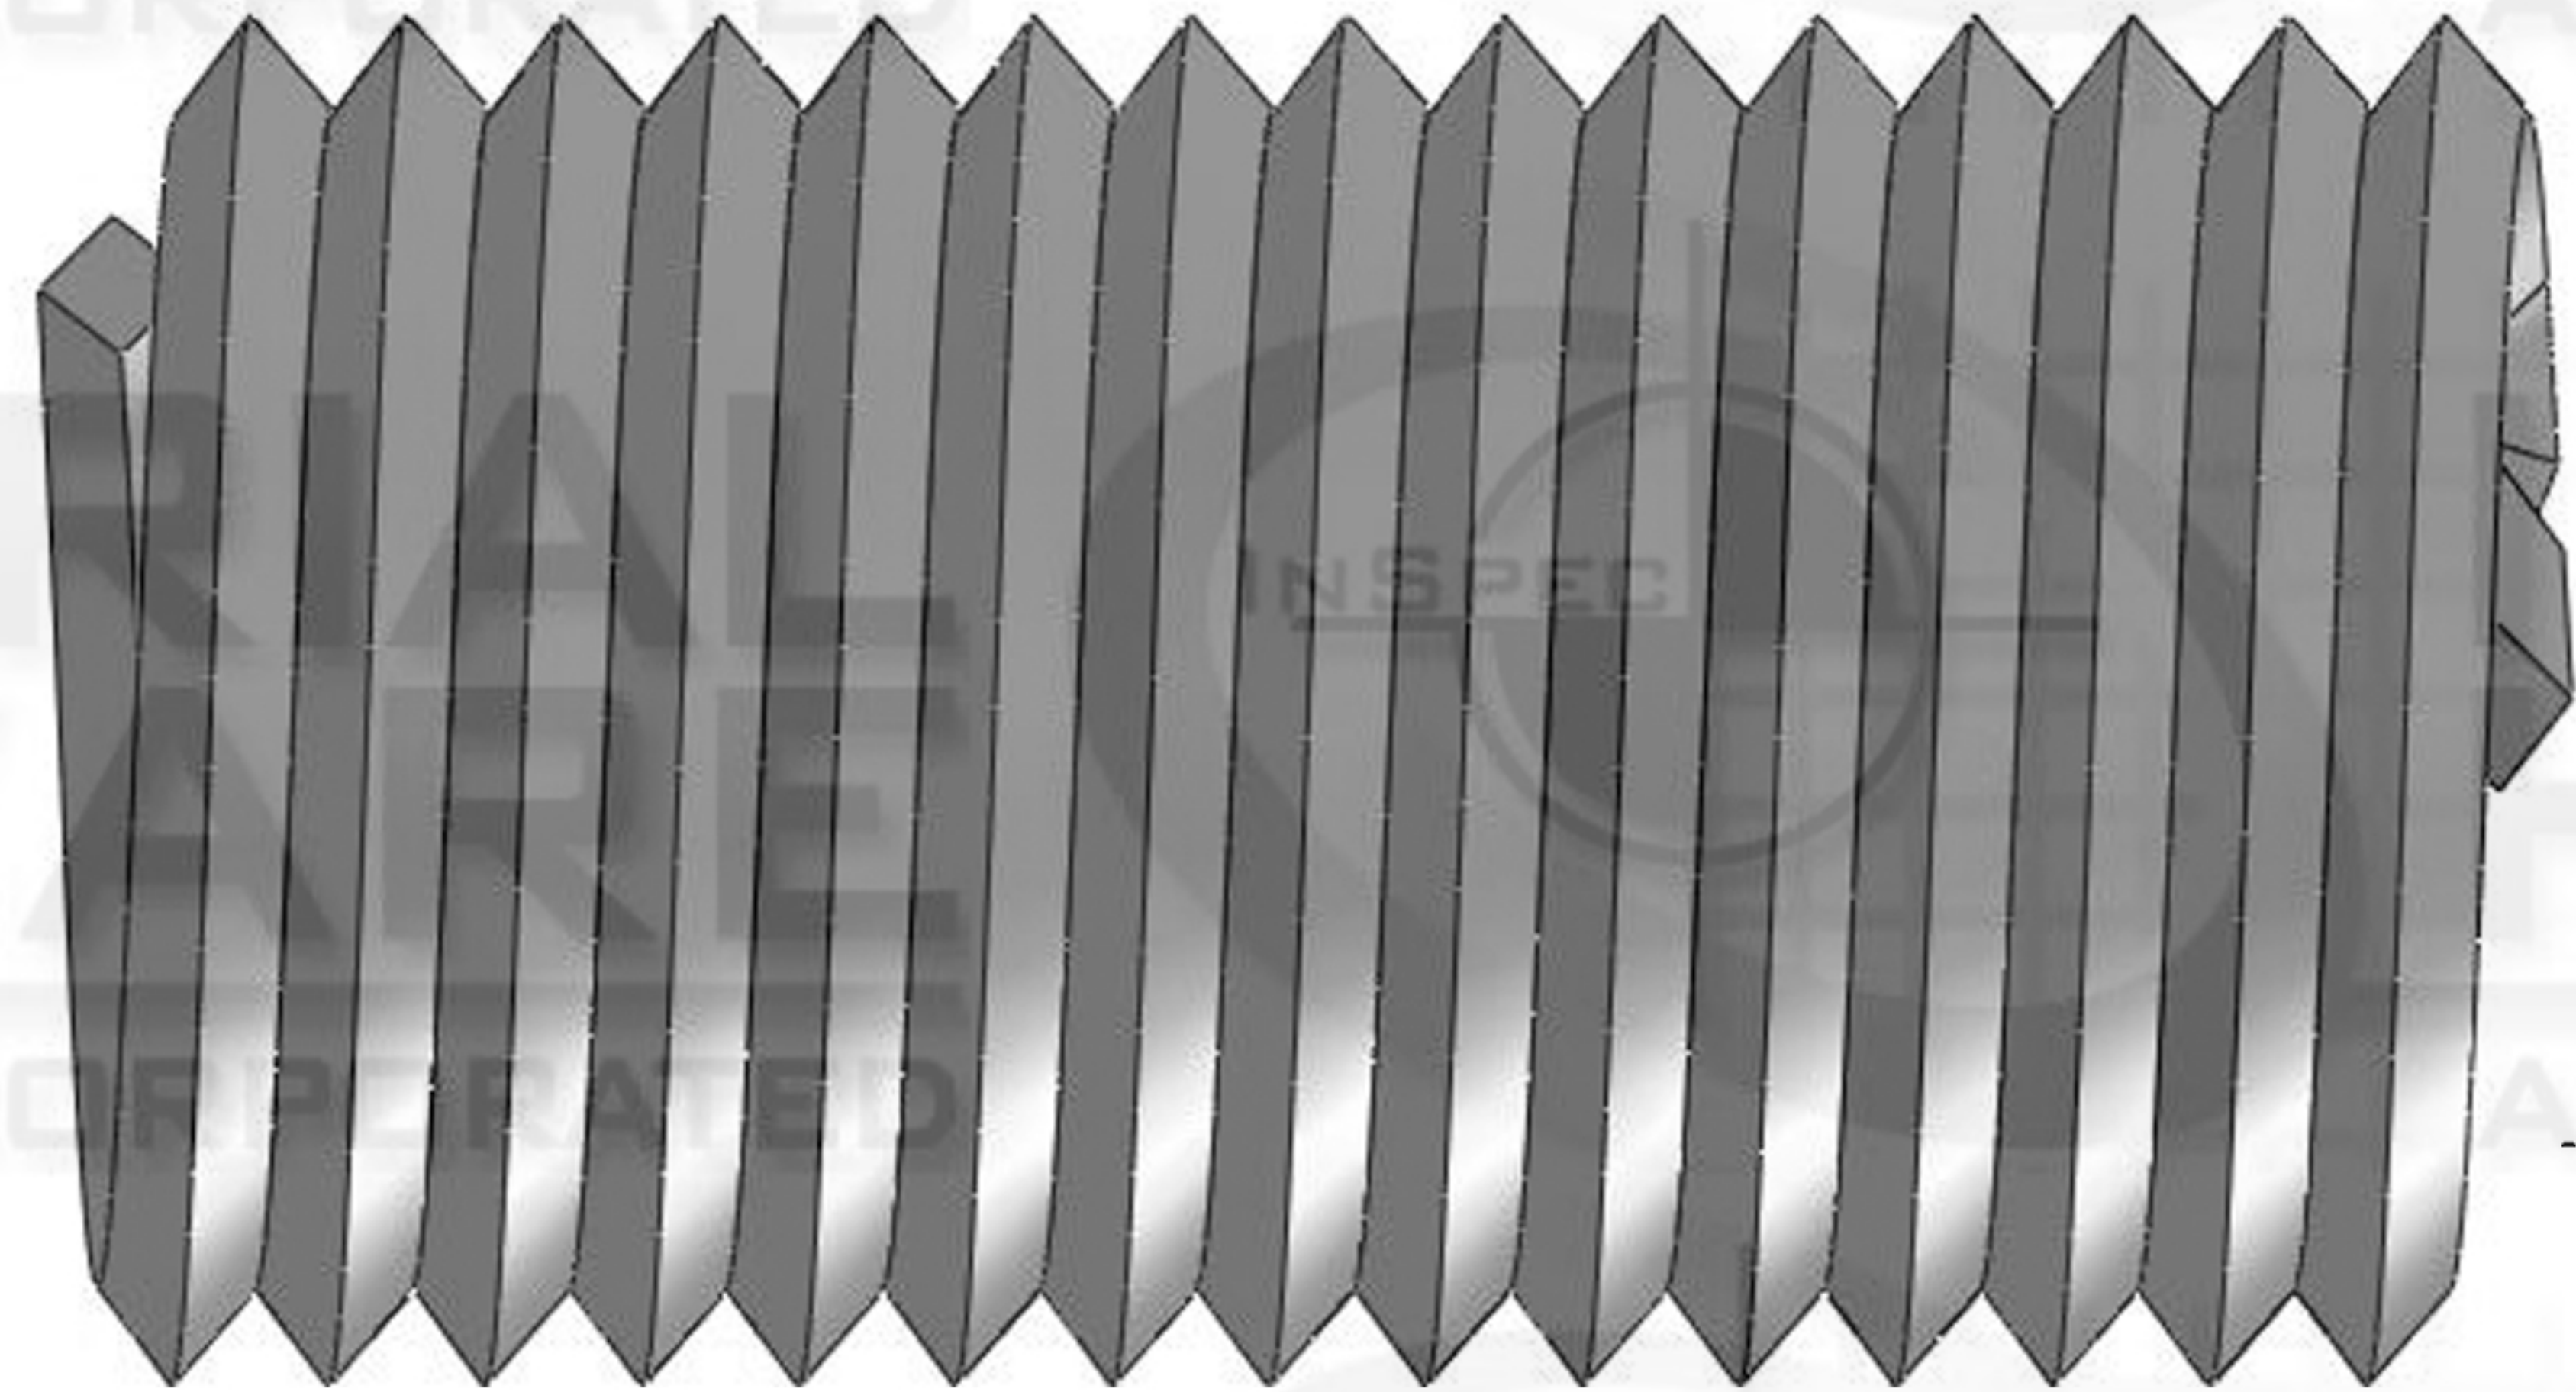
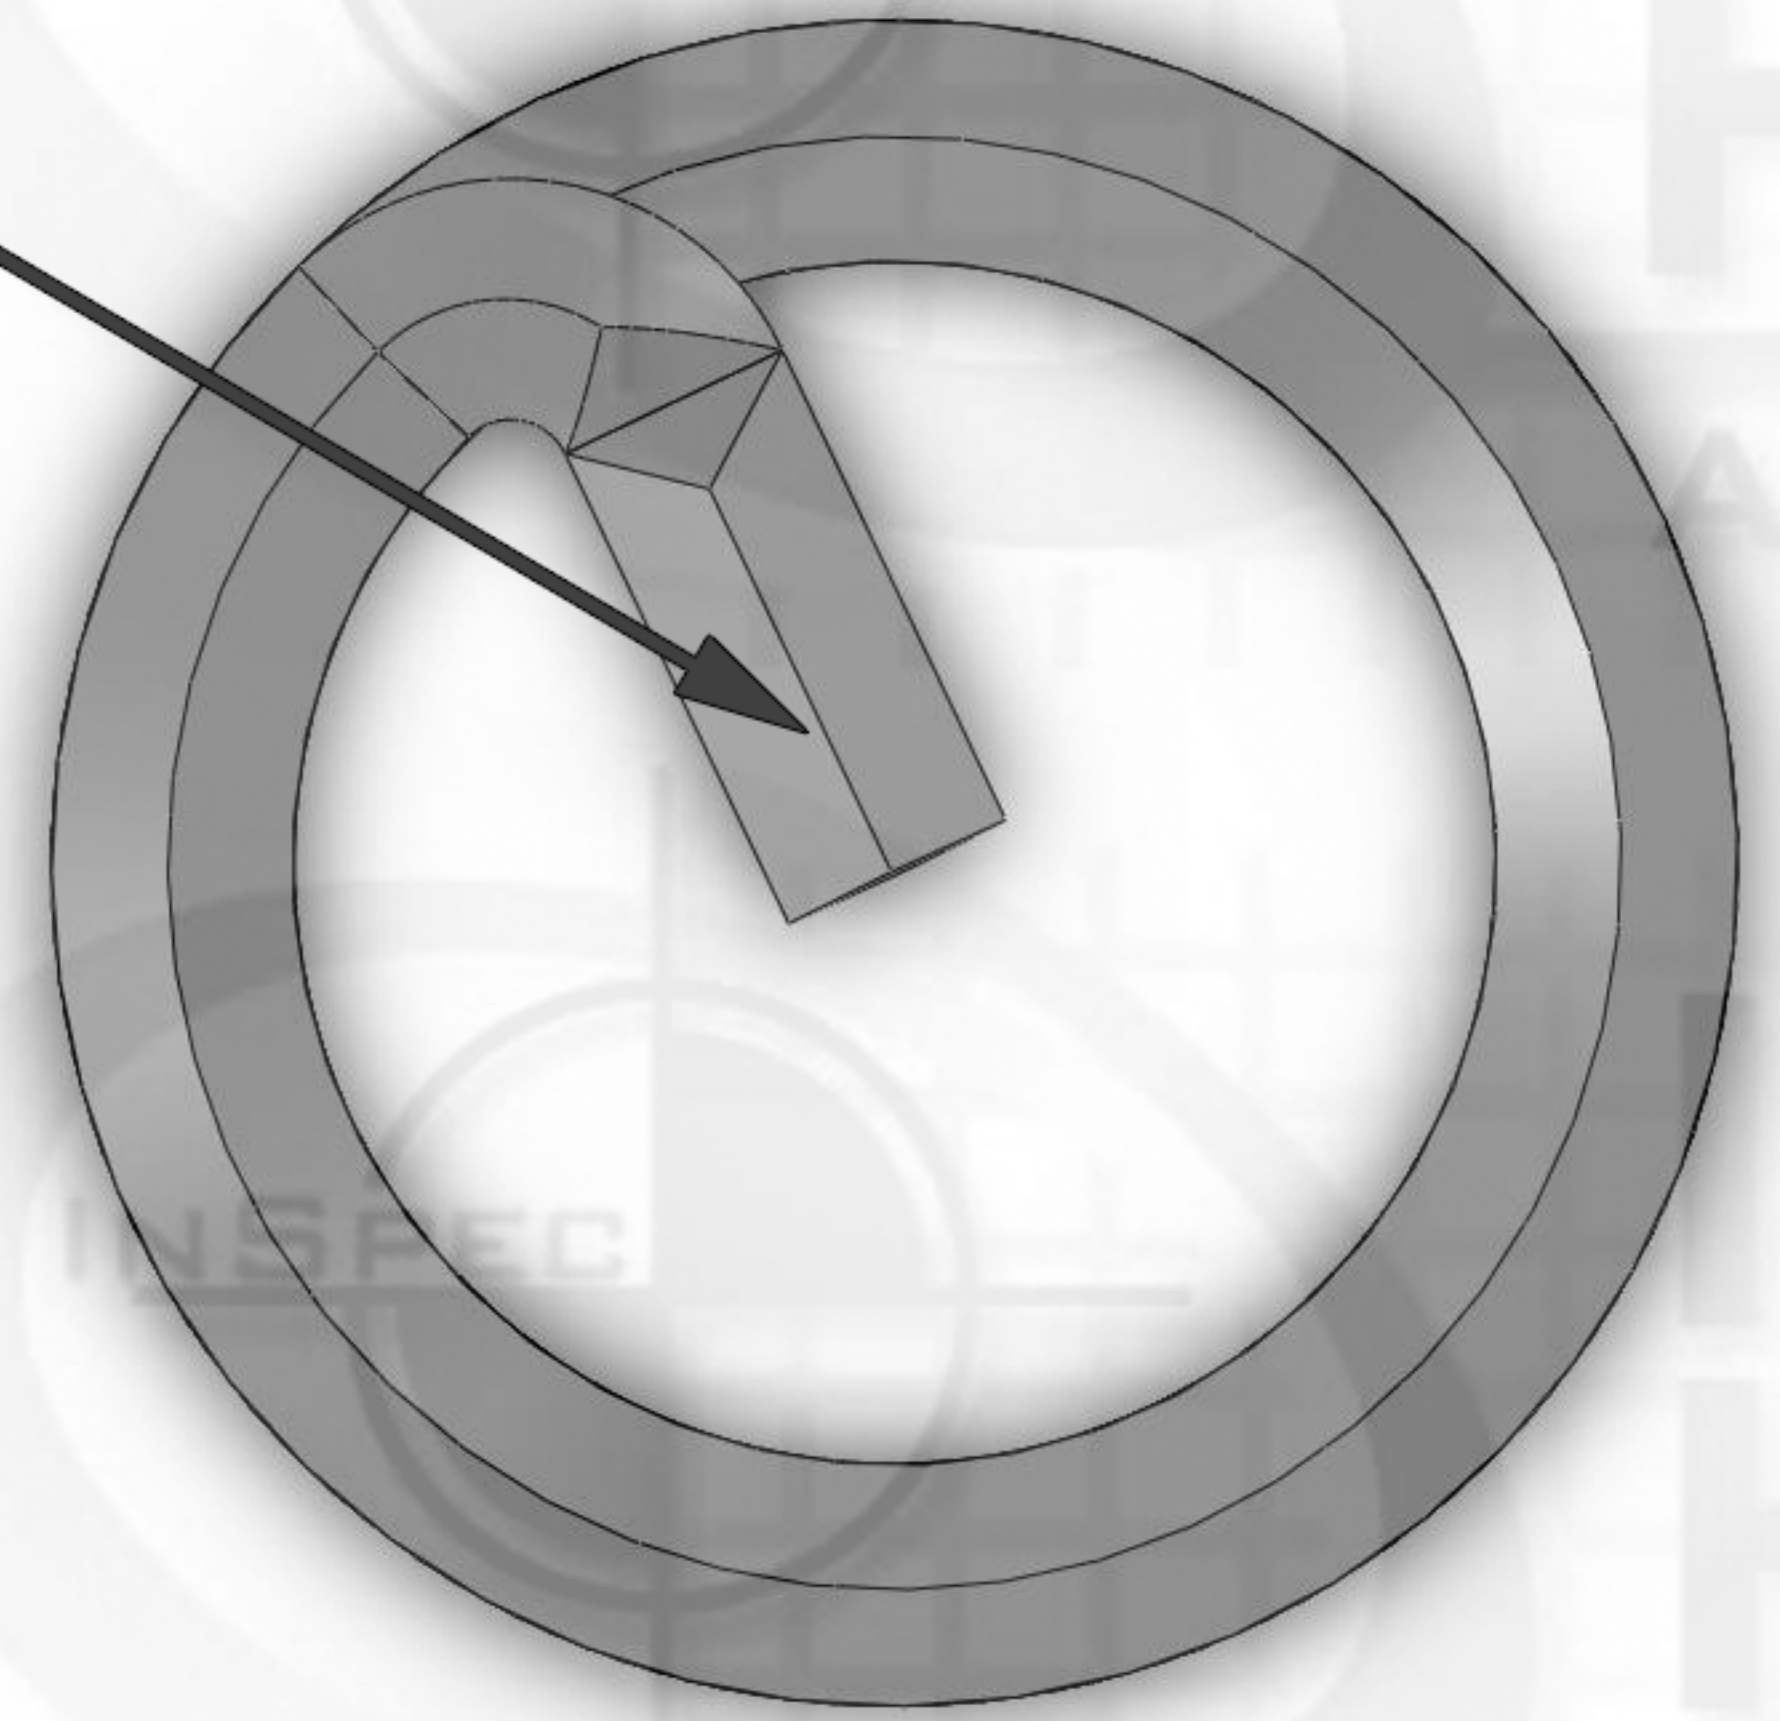


# WireSert Locking

Diameter Thread Pitch

12-28

Tang

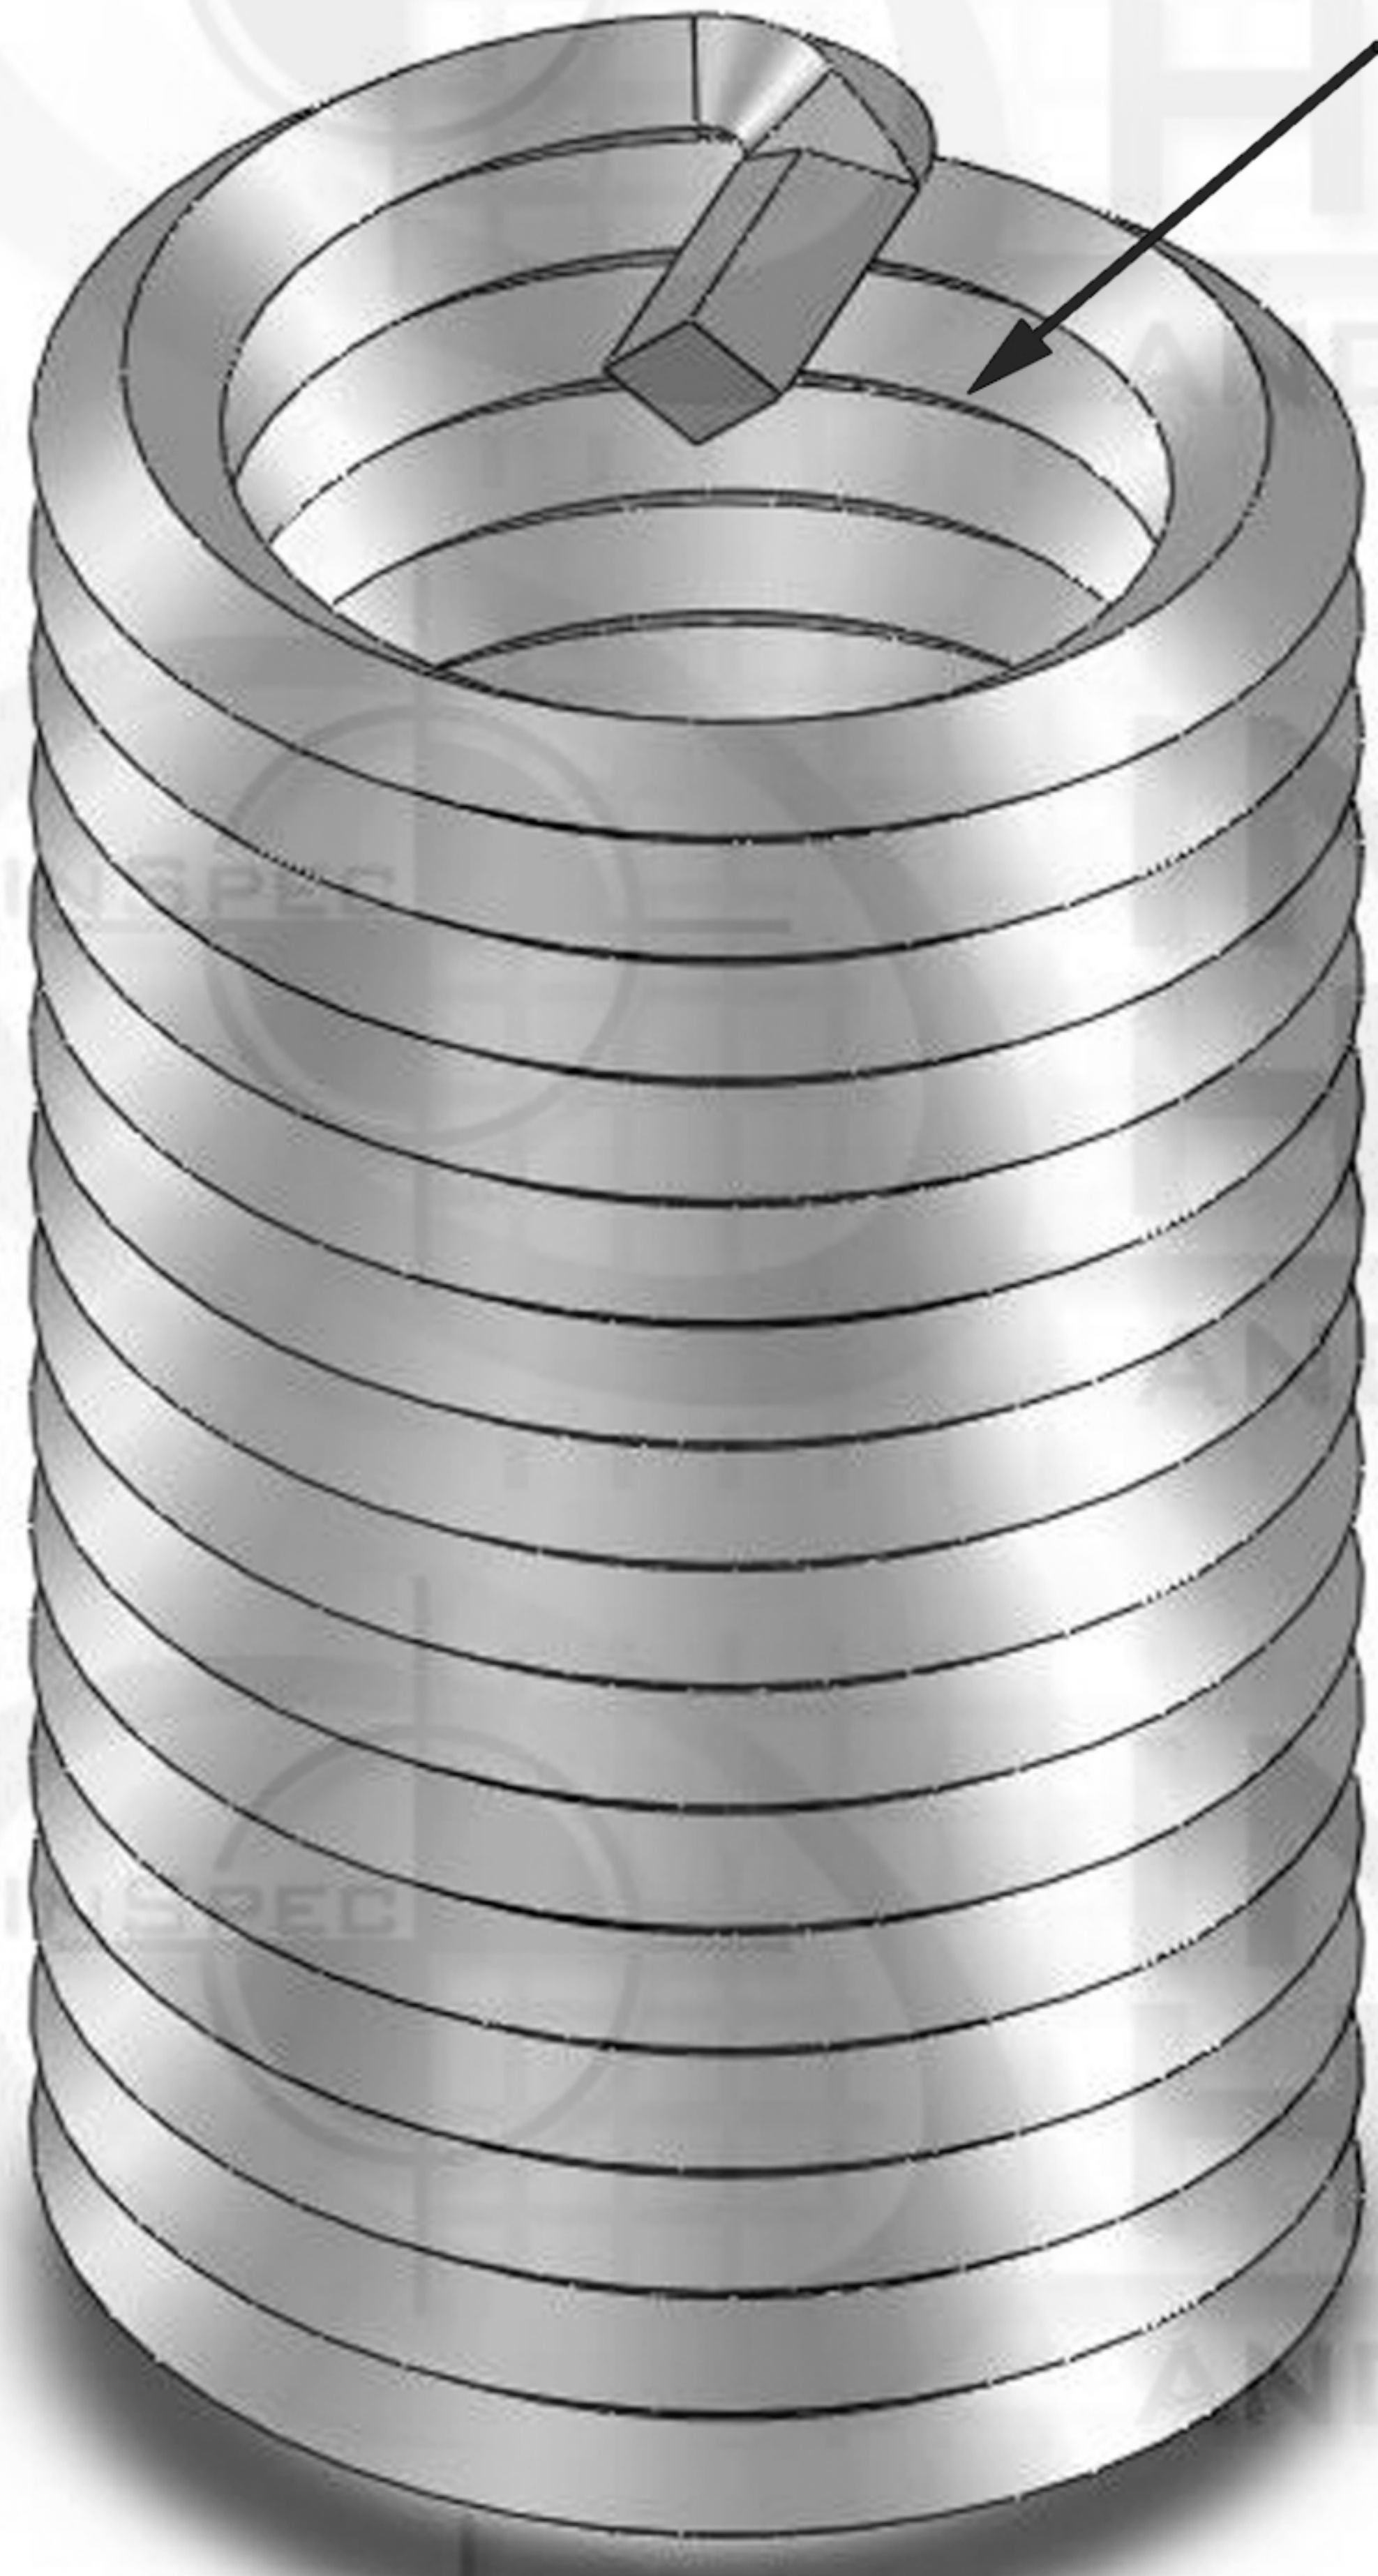

0.324

Suggested Drill Bit Size 0.2344 (15/64)



ZONE		REV.	REVISIONS DESCRIPTION	DATE	APPROVED

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

TH. STANDARD:	ANSI/ASME
ACRONYM:	UNF
ROTATION:	Right-Hand
MATERIAL FINISH	Stainless Steel 18-8
PART NUMBER	35L7C-C8K4-01215-34
APPLICATION	DO NOT SCALE DRAWING

NAME	DATE
DRAWN	
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	



**17-B KENTUCKY AVENUE  
PATERSON, NEW JERSEY 07503  
TEL: 973-684-4010 FAX: 973-684-3095  
email: TechSupport@industrialhardware.com  
www.industrialhardware.com**

SIZE	DWG. NO.	REV.
<b>A</b>		
SCALE: 1:8	WEIGHT: 0.03	SHEET 1 OF 1