
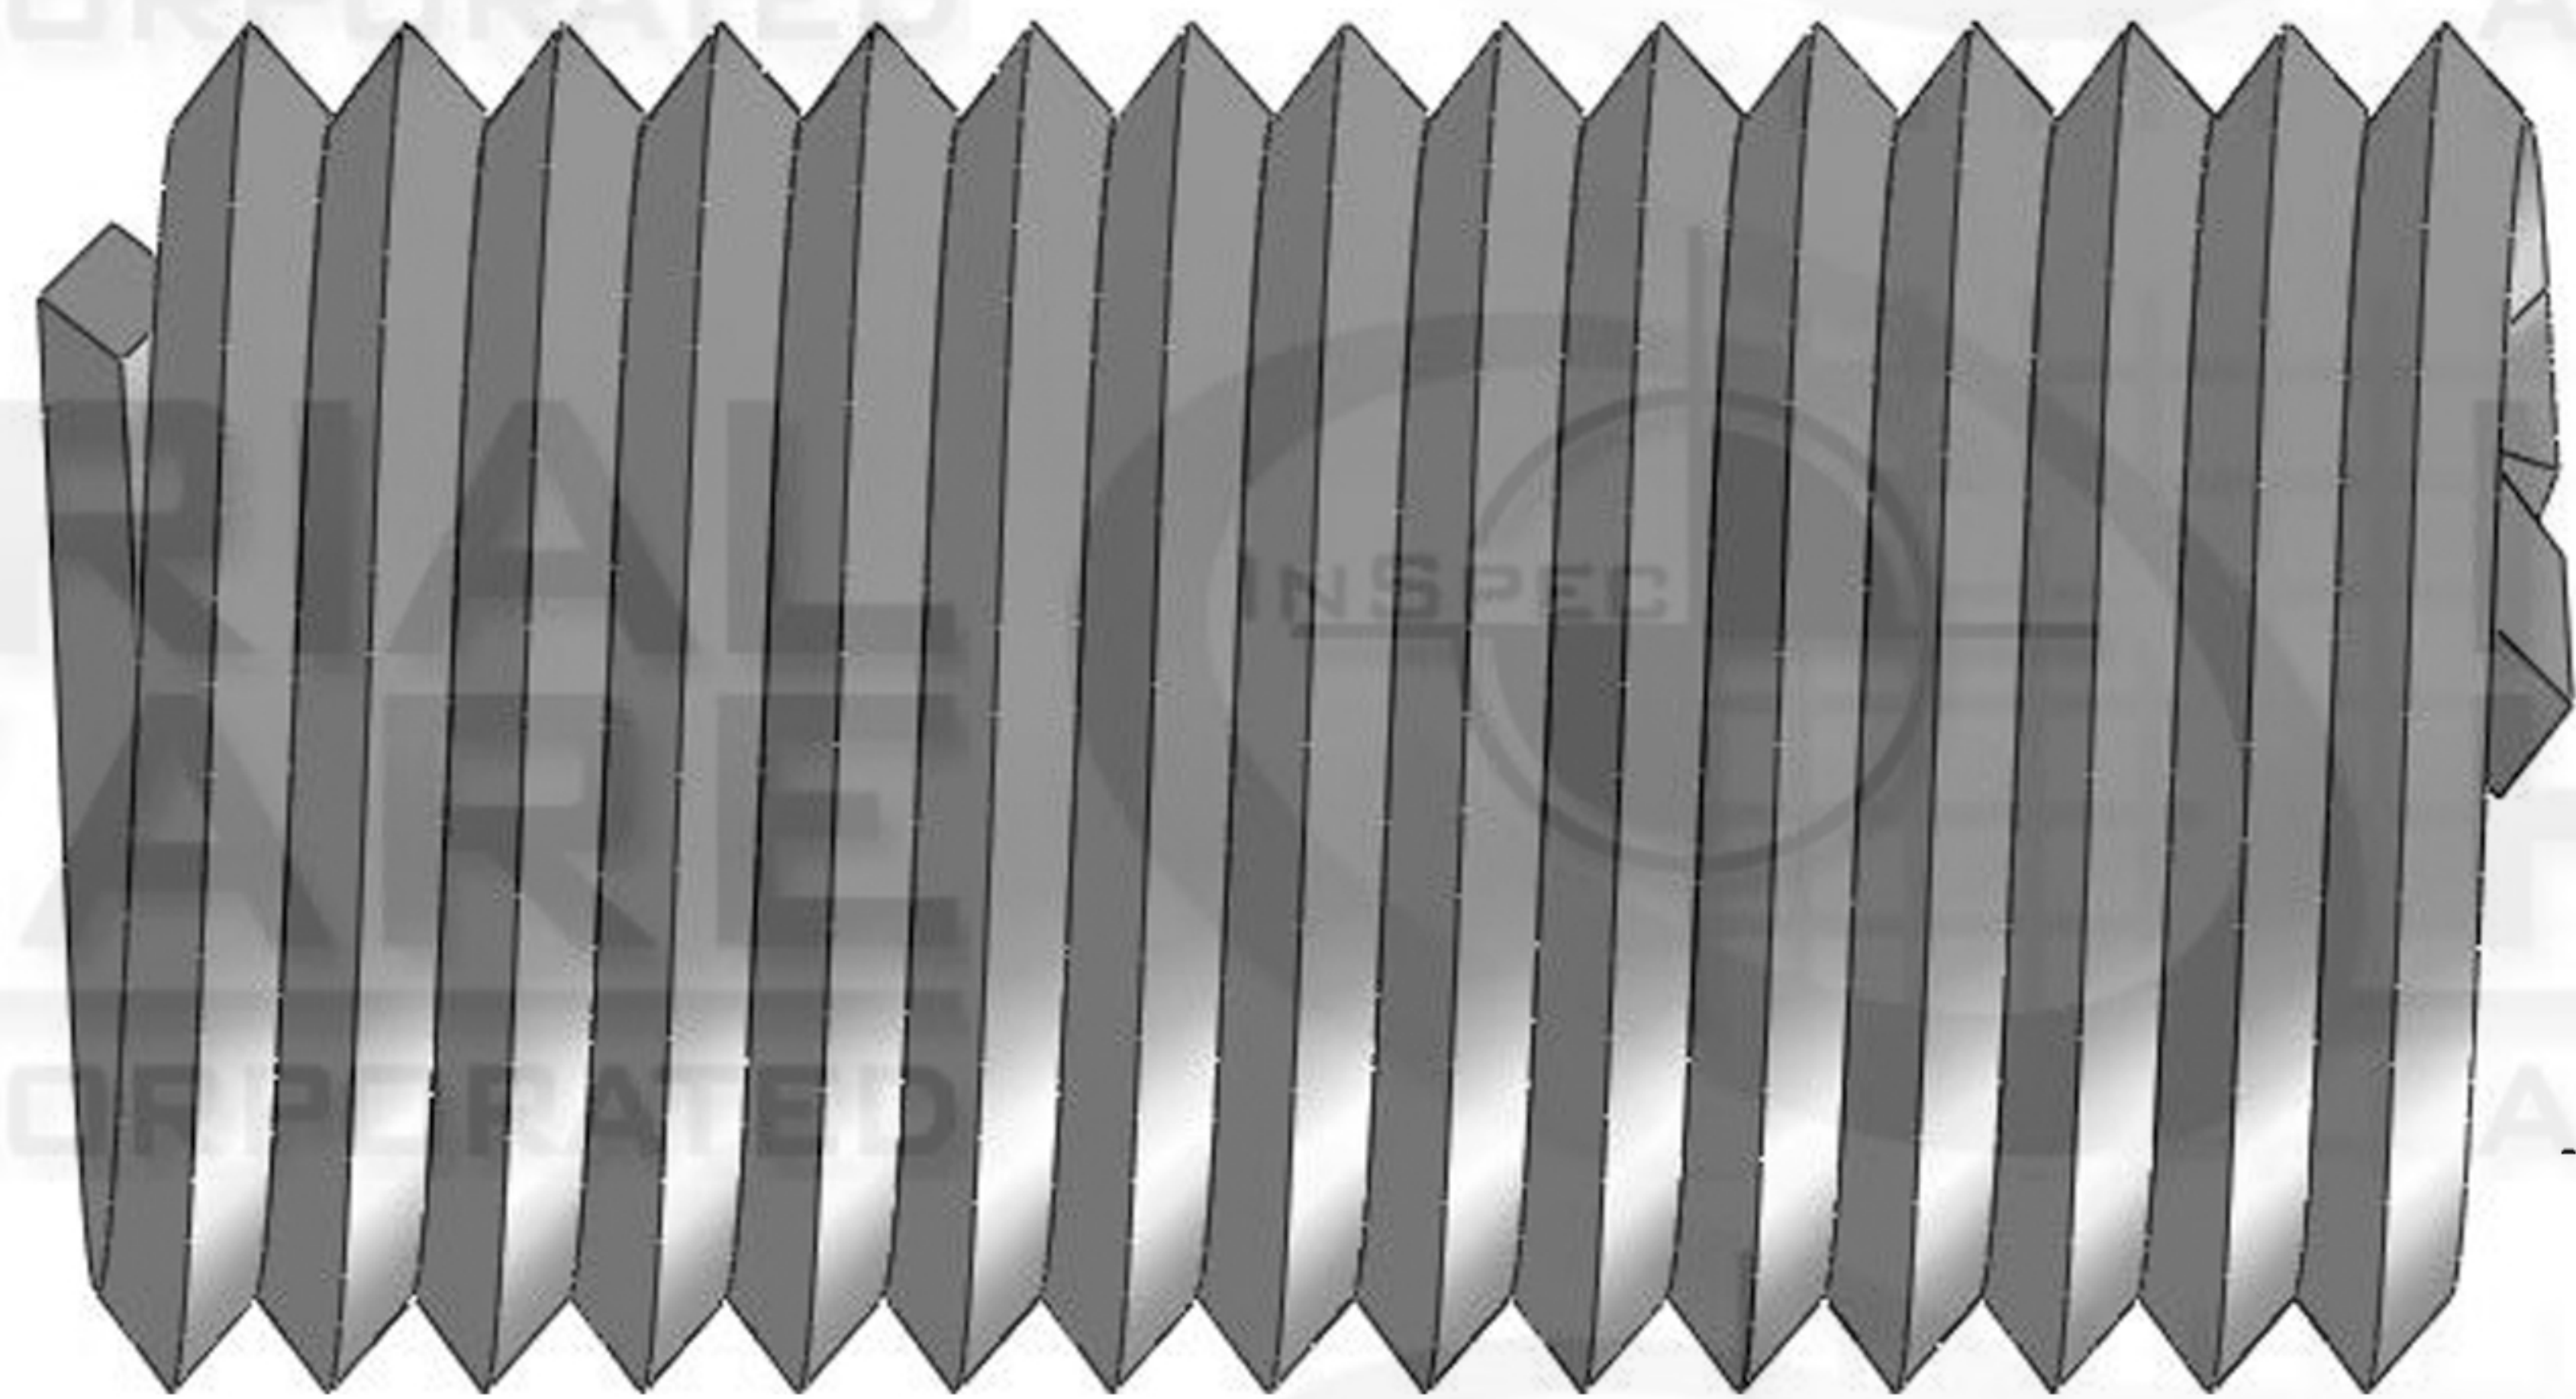
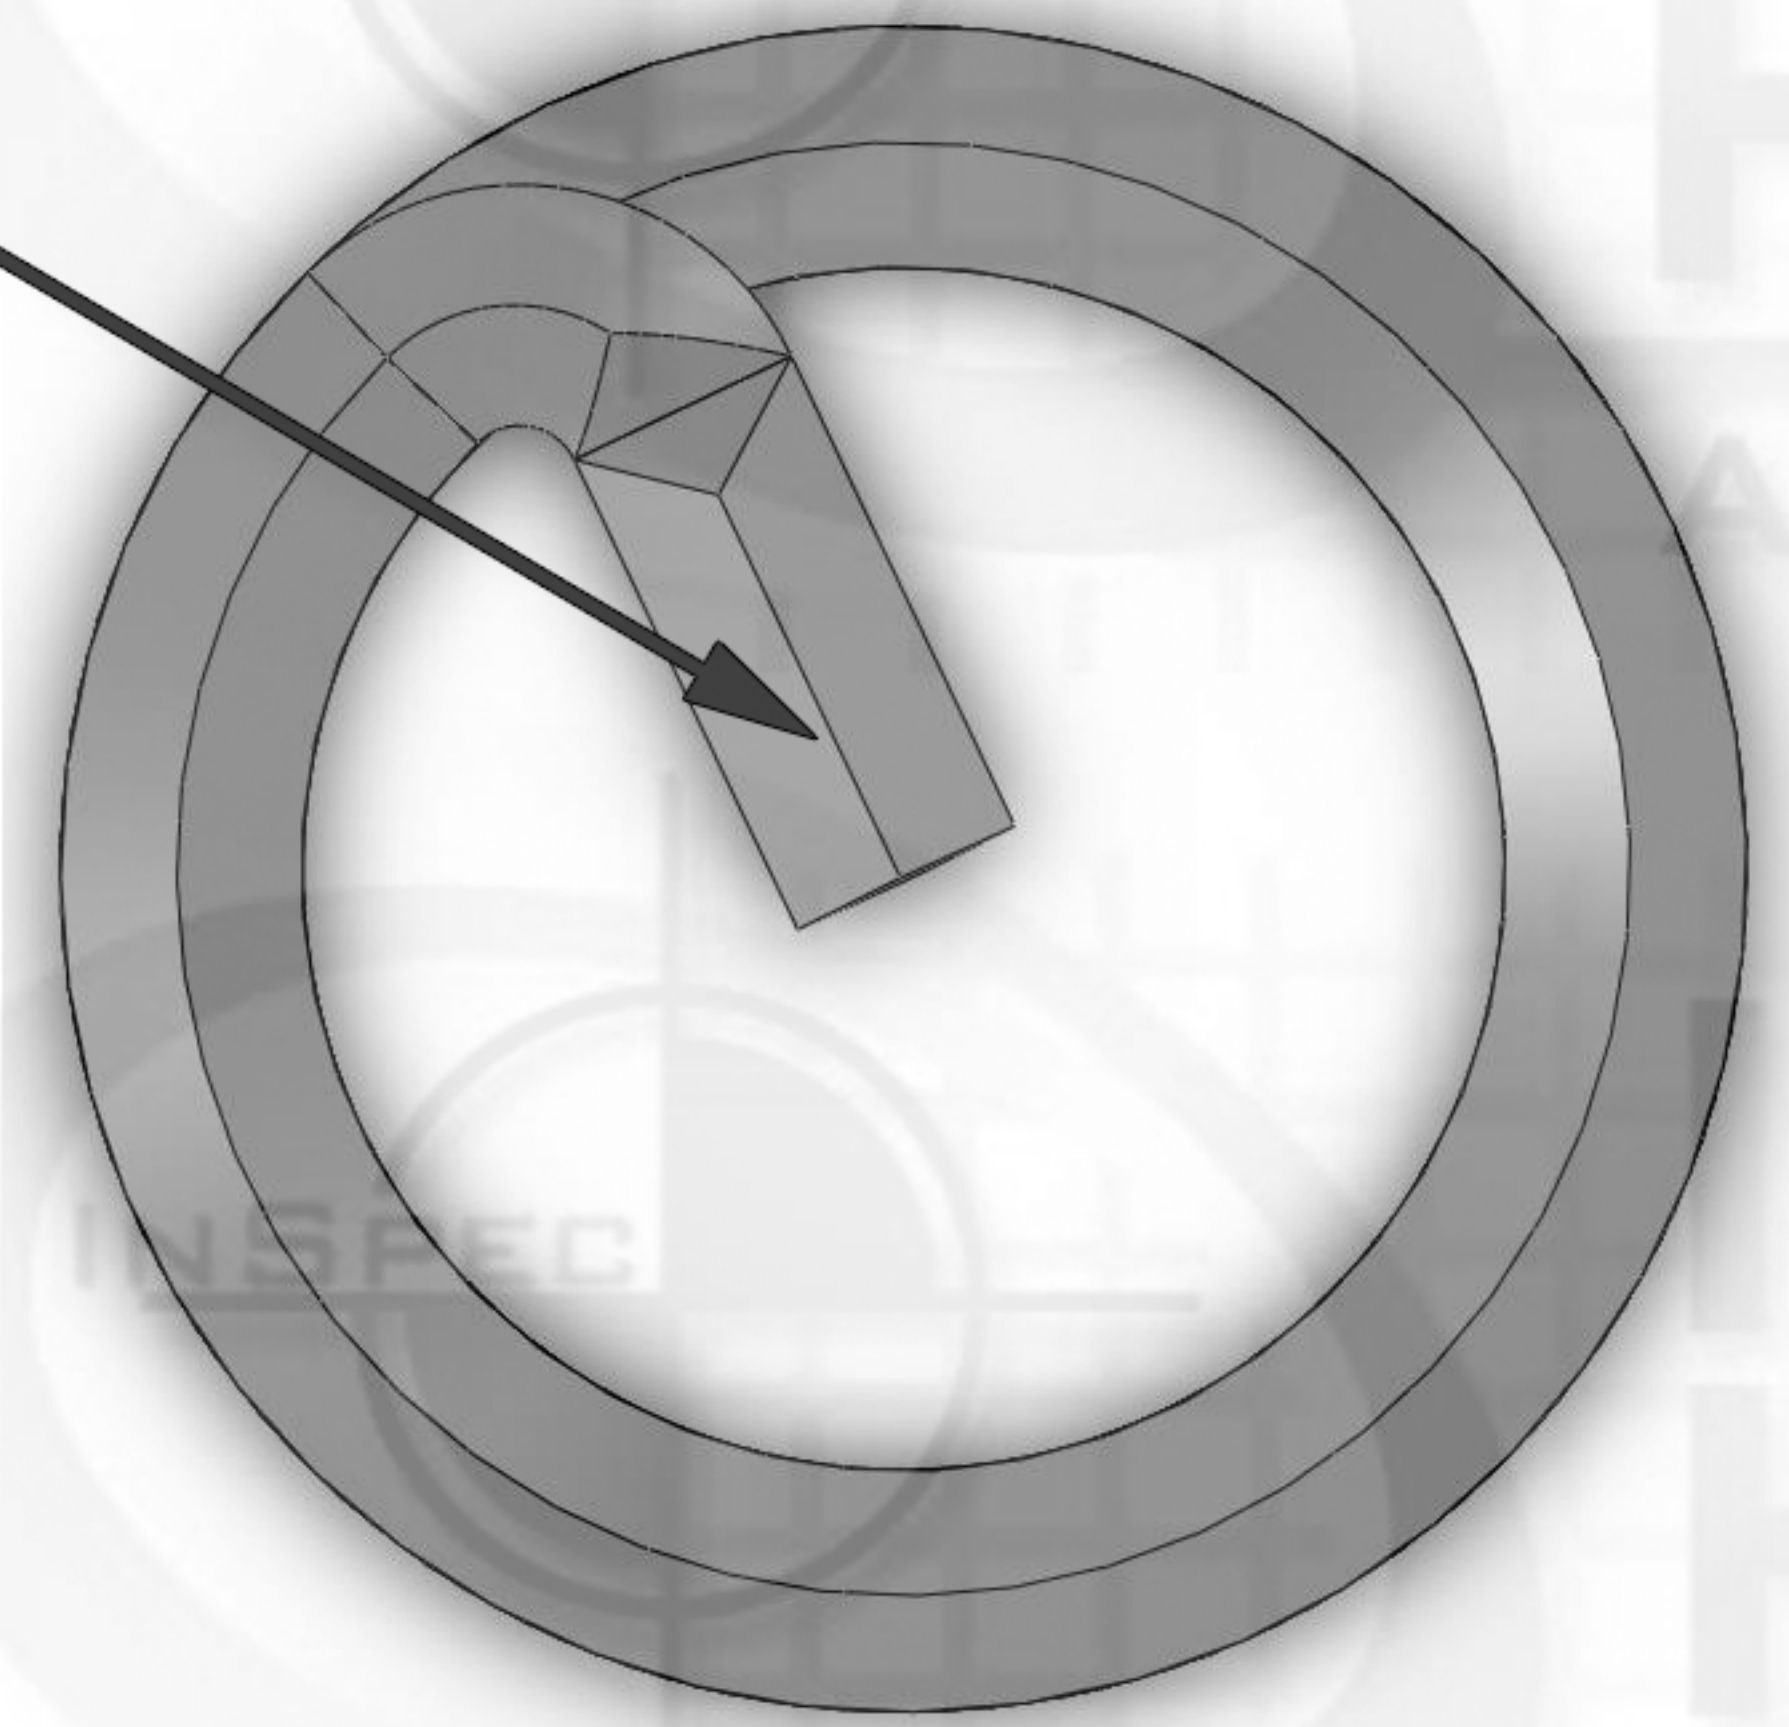


# WireSert Locking

Diameter Thread Pitch

5/16-24

Tang

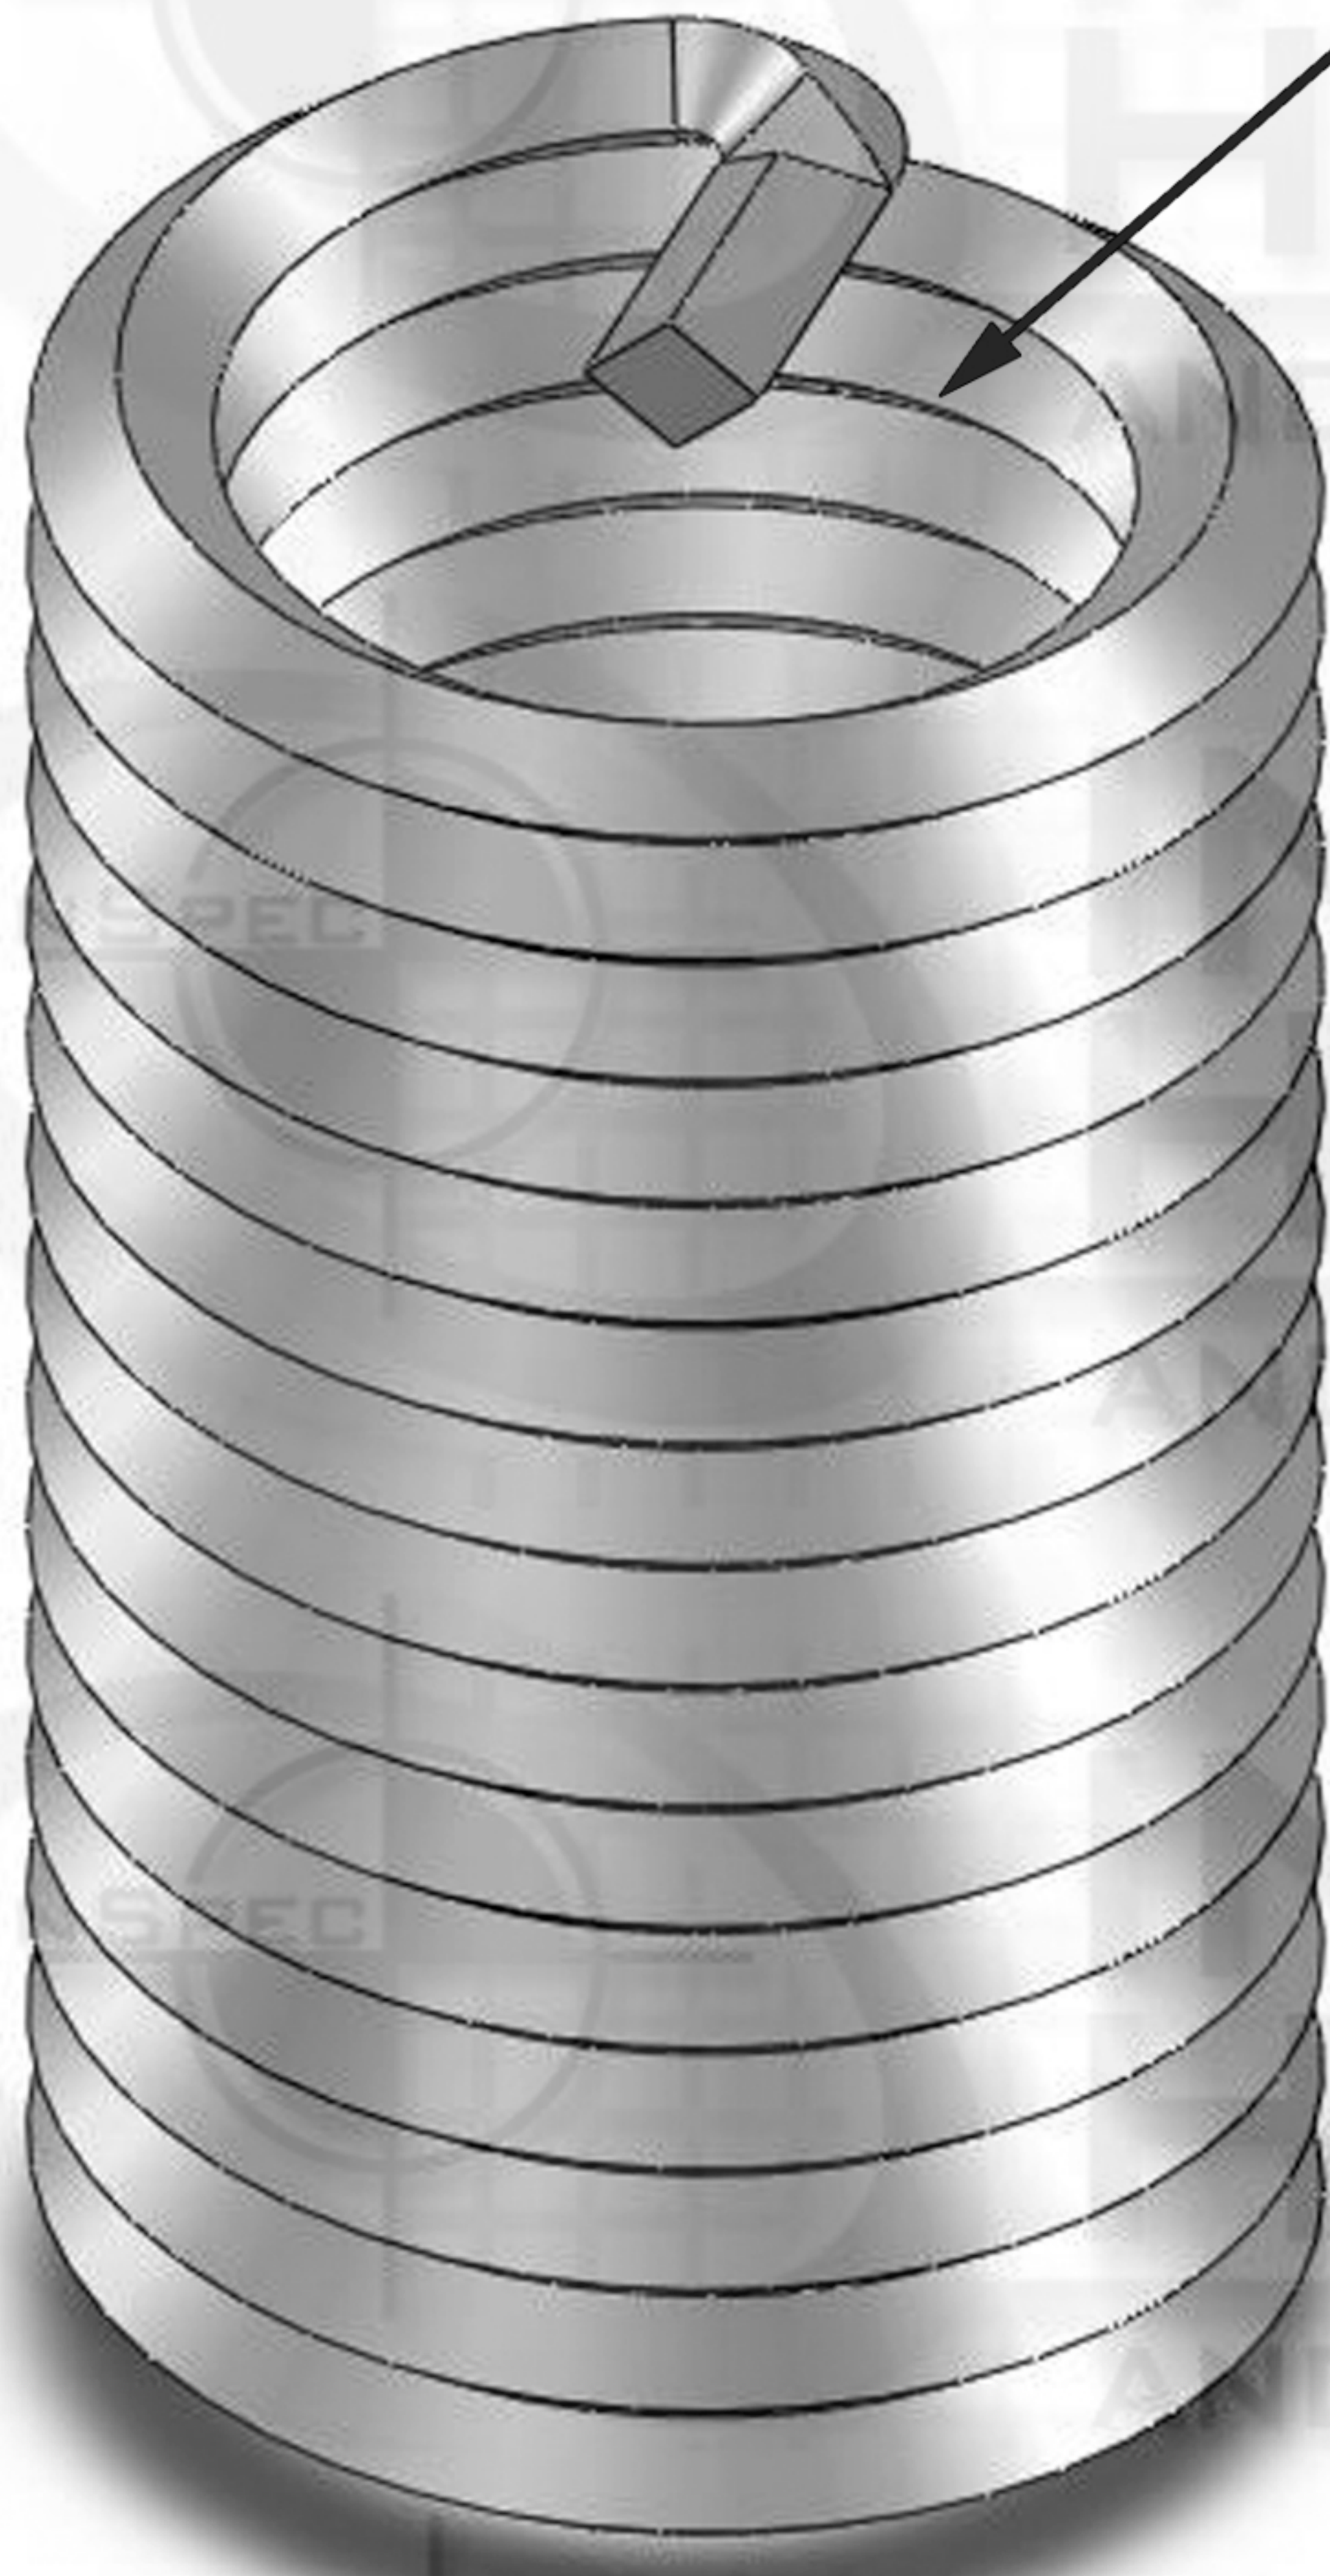

0.469

Suggested Drill Bit Size 0.3281 (21/64)



ZONE		REV.	REVISIONS DESCRIPTION	DATE	APPROVED

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

NATIONAL STOCK NUMBER	5340-00-847-0734	NAME	DATE
MILITARY STANDARD	MS21209-F5-15	DRAWN	
TH. STANDARD: ANSI/ASME		CHECKED	
ACRONYM: UNF		ENG APPR.	
ROTATION: Right-Hand		MFG APPR.	
MATERIAL FINISH	Stainless Steel 18-8	Q.A.	
PART NUMBER	35L7C-C8K4-03115-34	COMMENTS:	
NEXT ASSY	USED ON		
APPLICATION	DO NOT SCALE DRAWING		



**17-B KENTUCKY AVENUE**  
**PATERSON, NEW JERSEY 07503**  
**TEL: 973-684-4010 FAX: 973-684-3095**  
**email: TechSupport@industrialhardware.com**  
**www.industrialhardware.com**

SIZE	DWG. NO.	REV.
<b>A</b>		
SCALE: 1:8	WEIGHT: 0.29	SHEET 1 OF 1