


WireSert Locking

Diameter Thread Pitch

M24 x 3

Tang

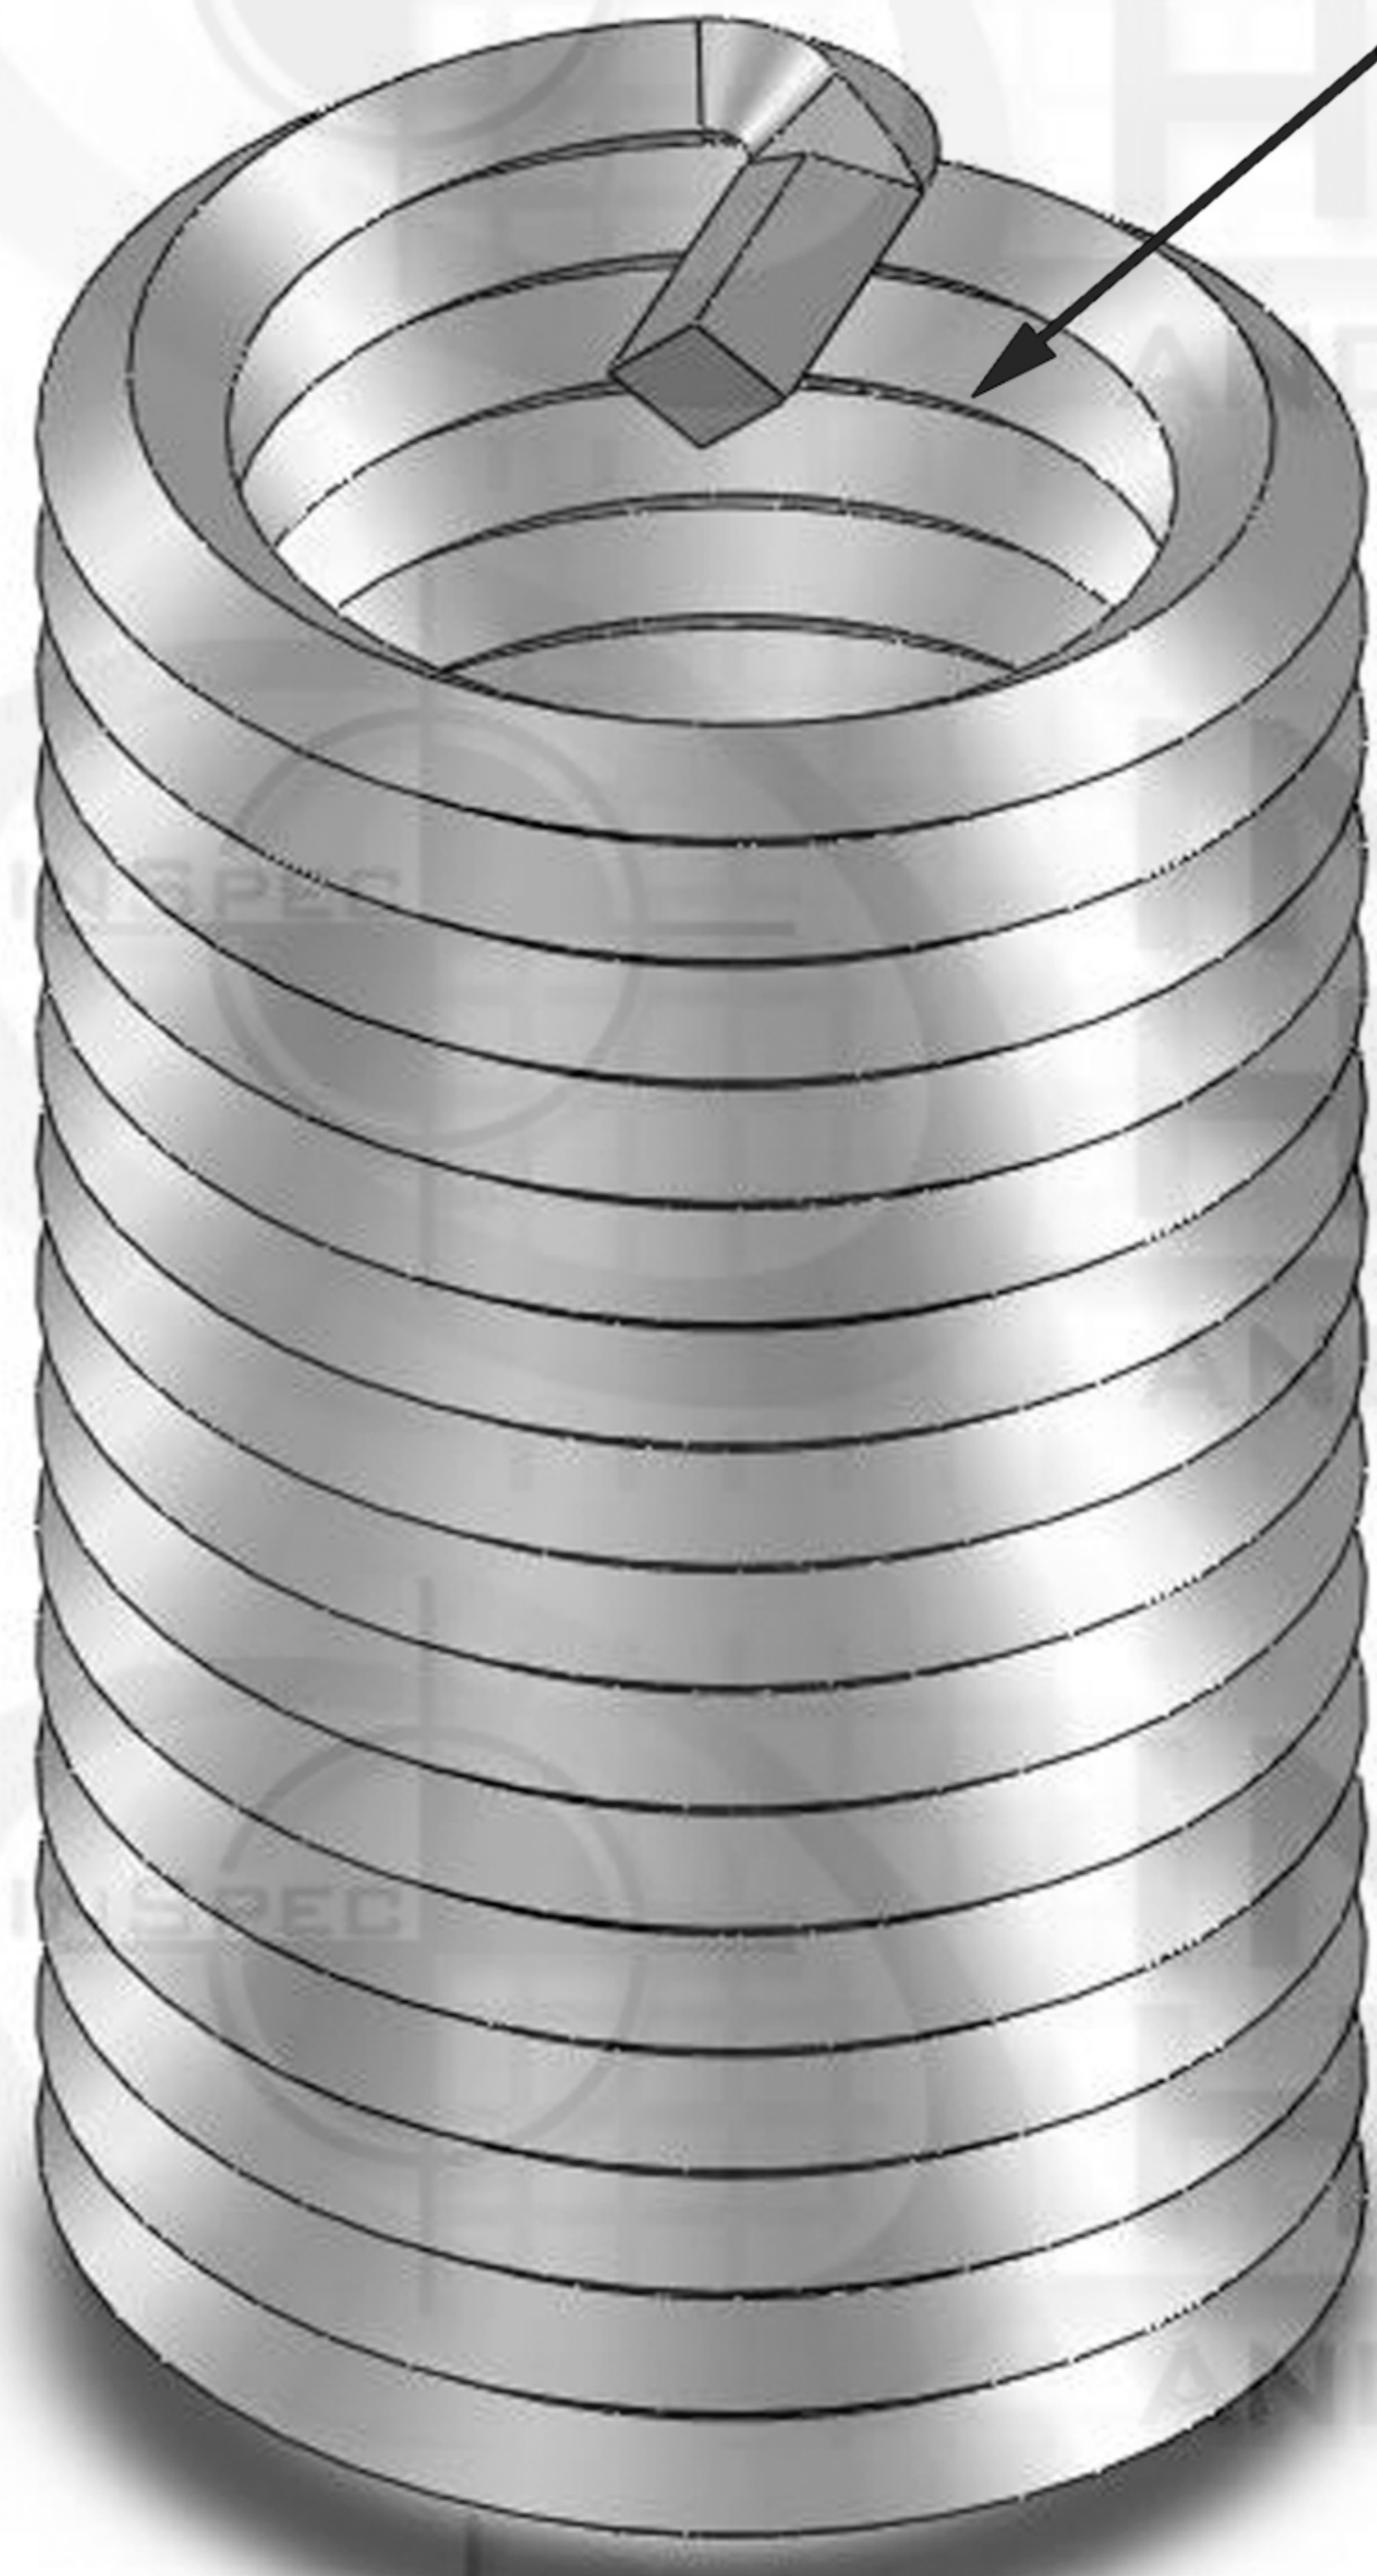

48mm

Suggested Drill Bit Size 0.9688 (31/32)



ZONE		REV.	REVISIONS DESCRIPTION	DATE	APPROVED

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

				NAME	DATE
				DRAWN	
				CHECKED	
				ENG APPR.	
				MFG APPR.	
				Q.A.	
				COMMENTS:	
NEXT ASSY	USED ON	PART NUMBER			
		35L7C-C8M2-C24Q20-0F			
APPLICATION	DO NOT SCALE DRAWING				

AEROSPACE
MA3329-229
TH. STANDARD: ISO Metric
ACRONYM: ISO
ROTATION: Right-Hand
MATERIAL FINISH
Stainless Steel 18-8



INDUSTRIAL HARDWARE
AND SPECIALTIES INCORPORATED

17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com

SIZE	DWG. NO.	REV.
A		
SCALE: 1:8	WEIGHT: 1.53	SHEET 1 OF 1