


Key-Locking Solid Tappable Core

		REVISIONS	DATE	APPROVED
ZONE	REV.	DESCRIPTION		



External Thread Pitch
1-12

Key

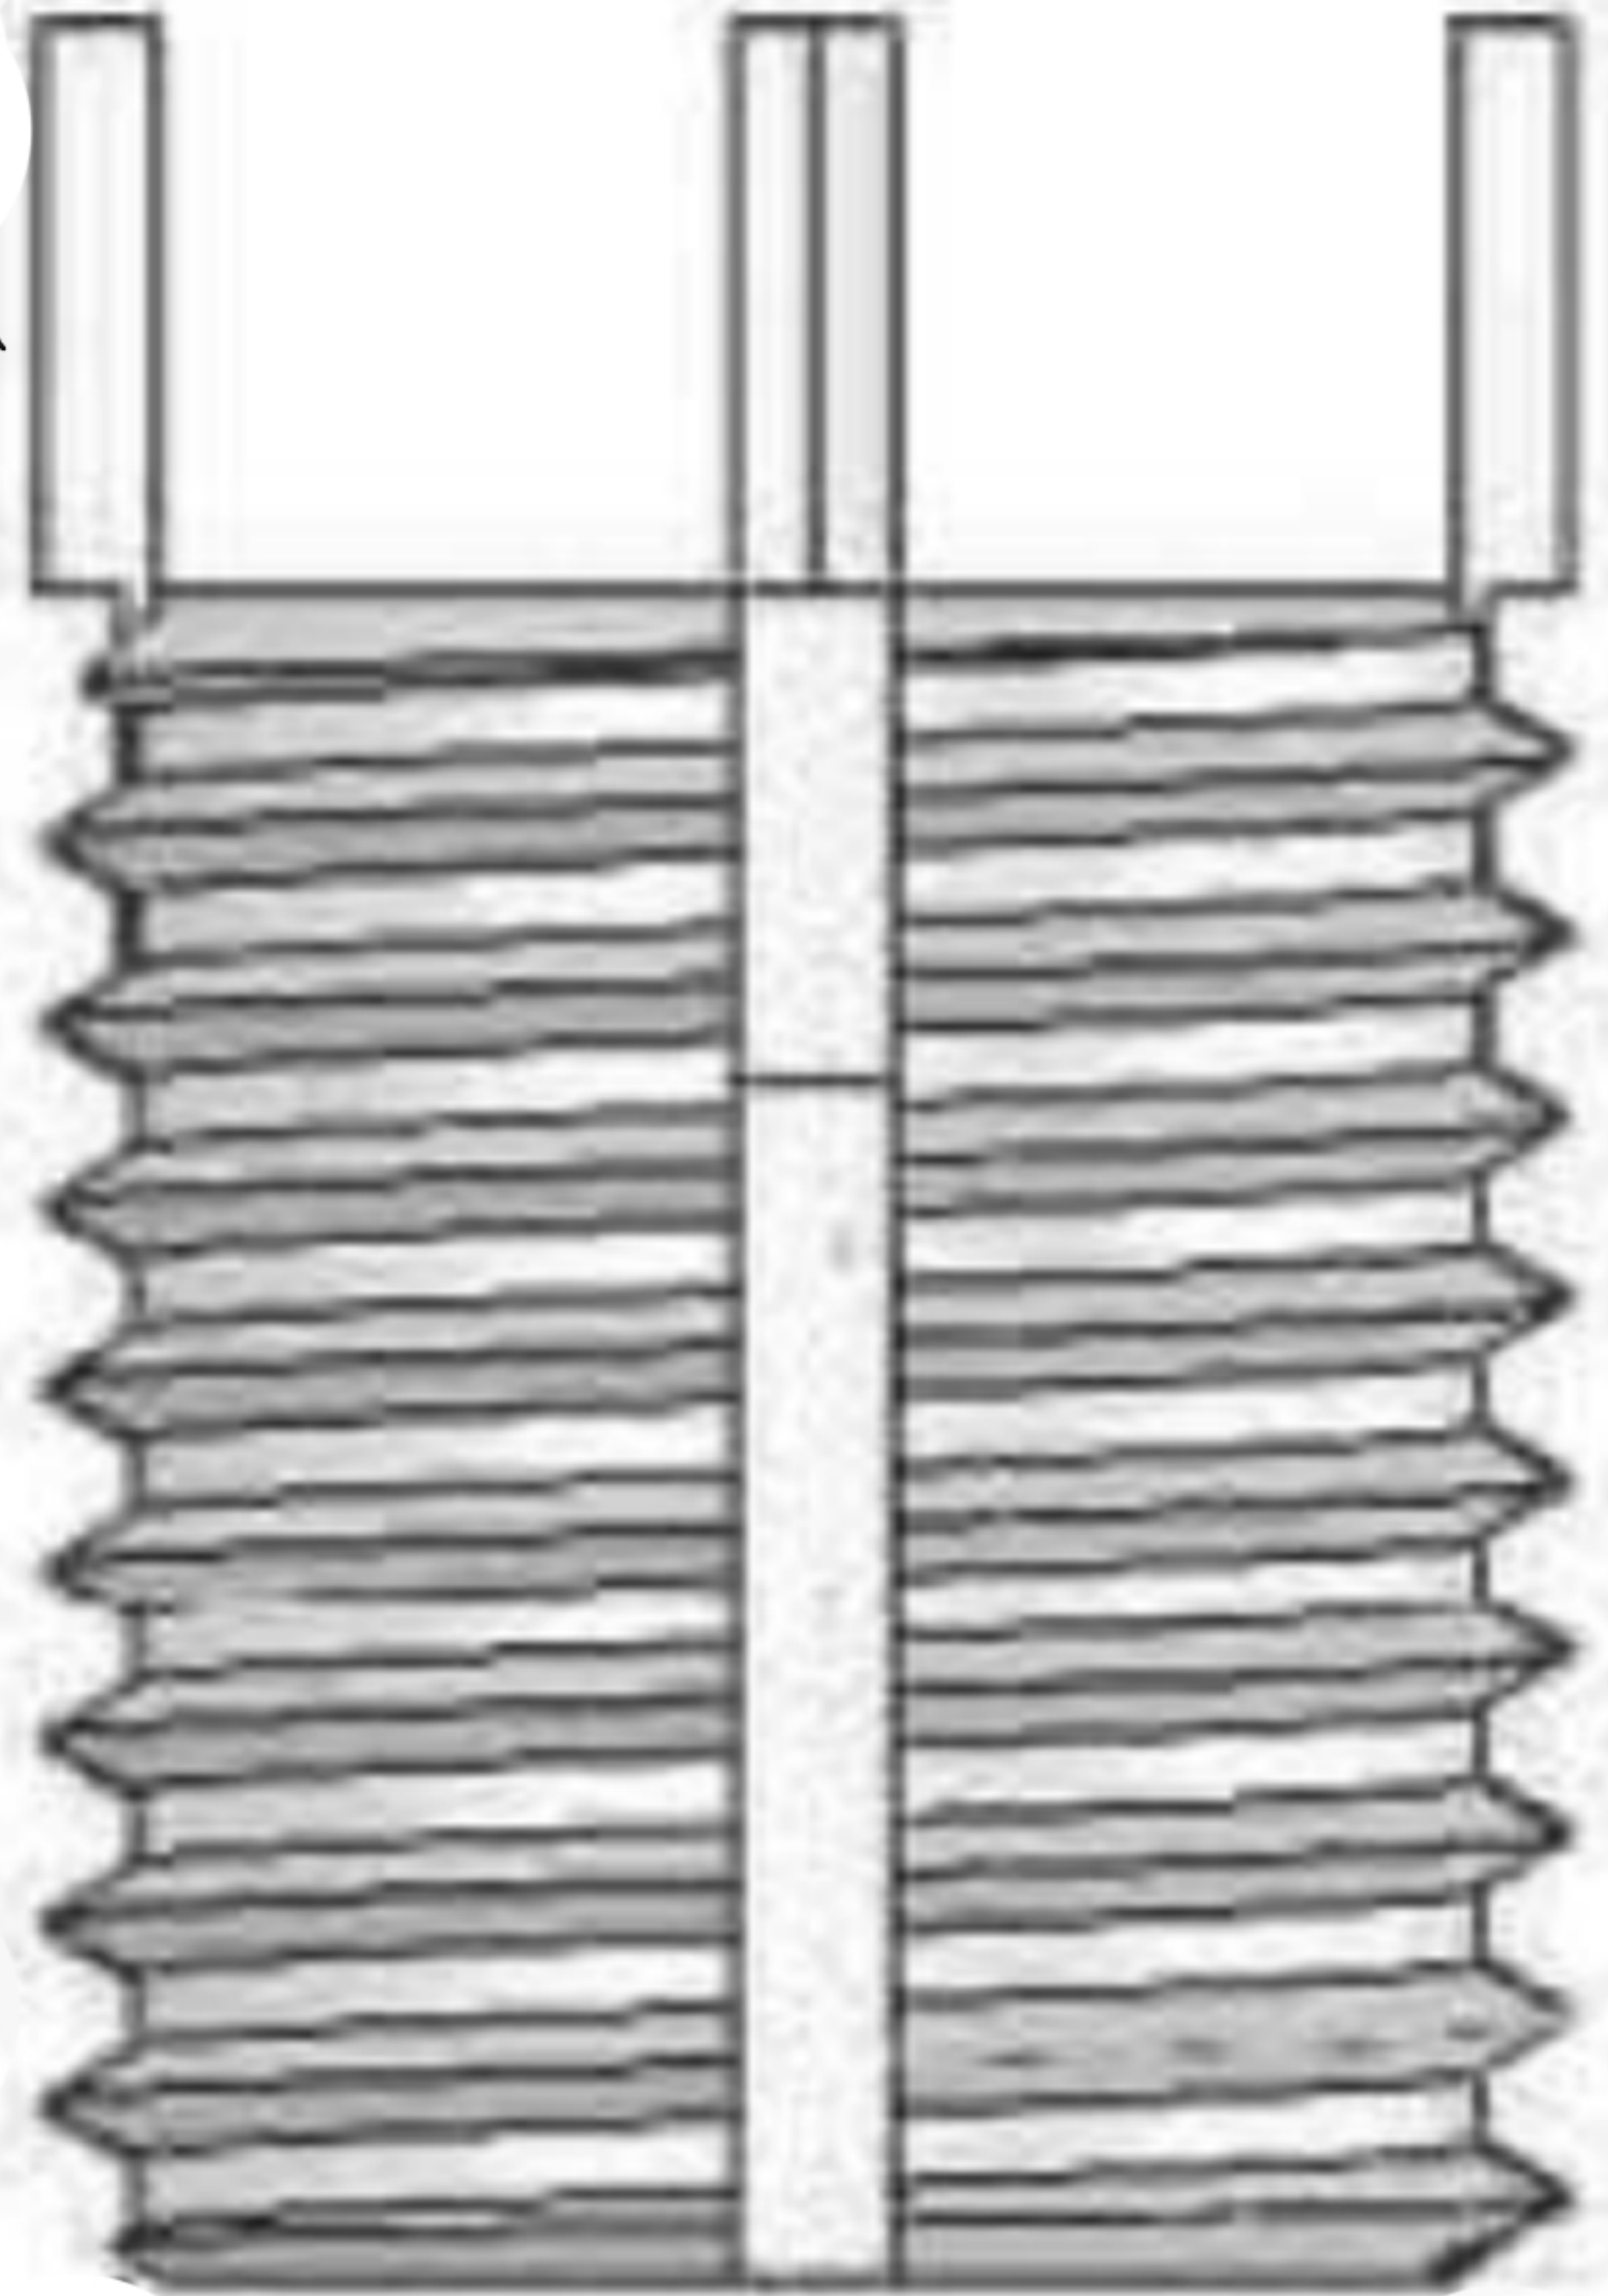

0.875

Suggested Drill Bit Size



0.9375 (15/16)

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

		NAME	DATE
		DRAWN	
		CHECKED	
		ENG APPR.	
		MFG APPR.	
		Q.A.	
		COMMENTS:	
NEXT ASSY	USED ON		
APPLICATION		DO NOT SCALE DRAWING	

TH. STANDARD: ANSI/ASME
ACRONYM: UNF
ROTATION: Right-Hand
MATERIAL FINISH
Stainless Steel Type 303
PART NUMBER
35L8C-65UU-100



17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com

SIZE DWG. NO. REV.
A
SCALE:1:8 WEIGHT: SHEET 1 OF 1