


# Key-Locking Solid Tappable Core

		REVISIONS	DATE	APPROVED
ZONE	REV.	DESCRIPTION		



External Thread Pitch  
1-3/8-12

Key

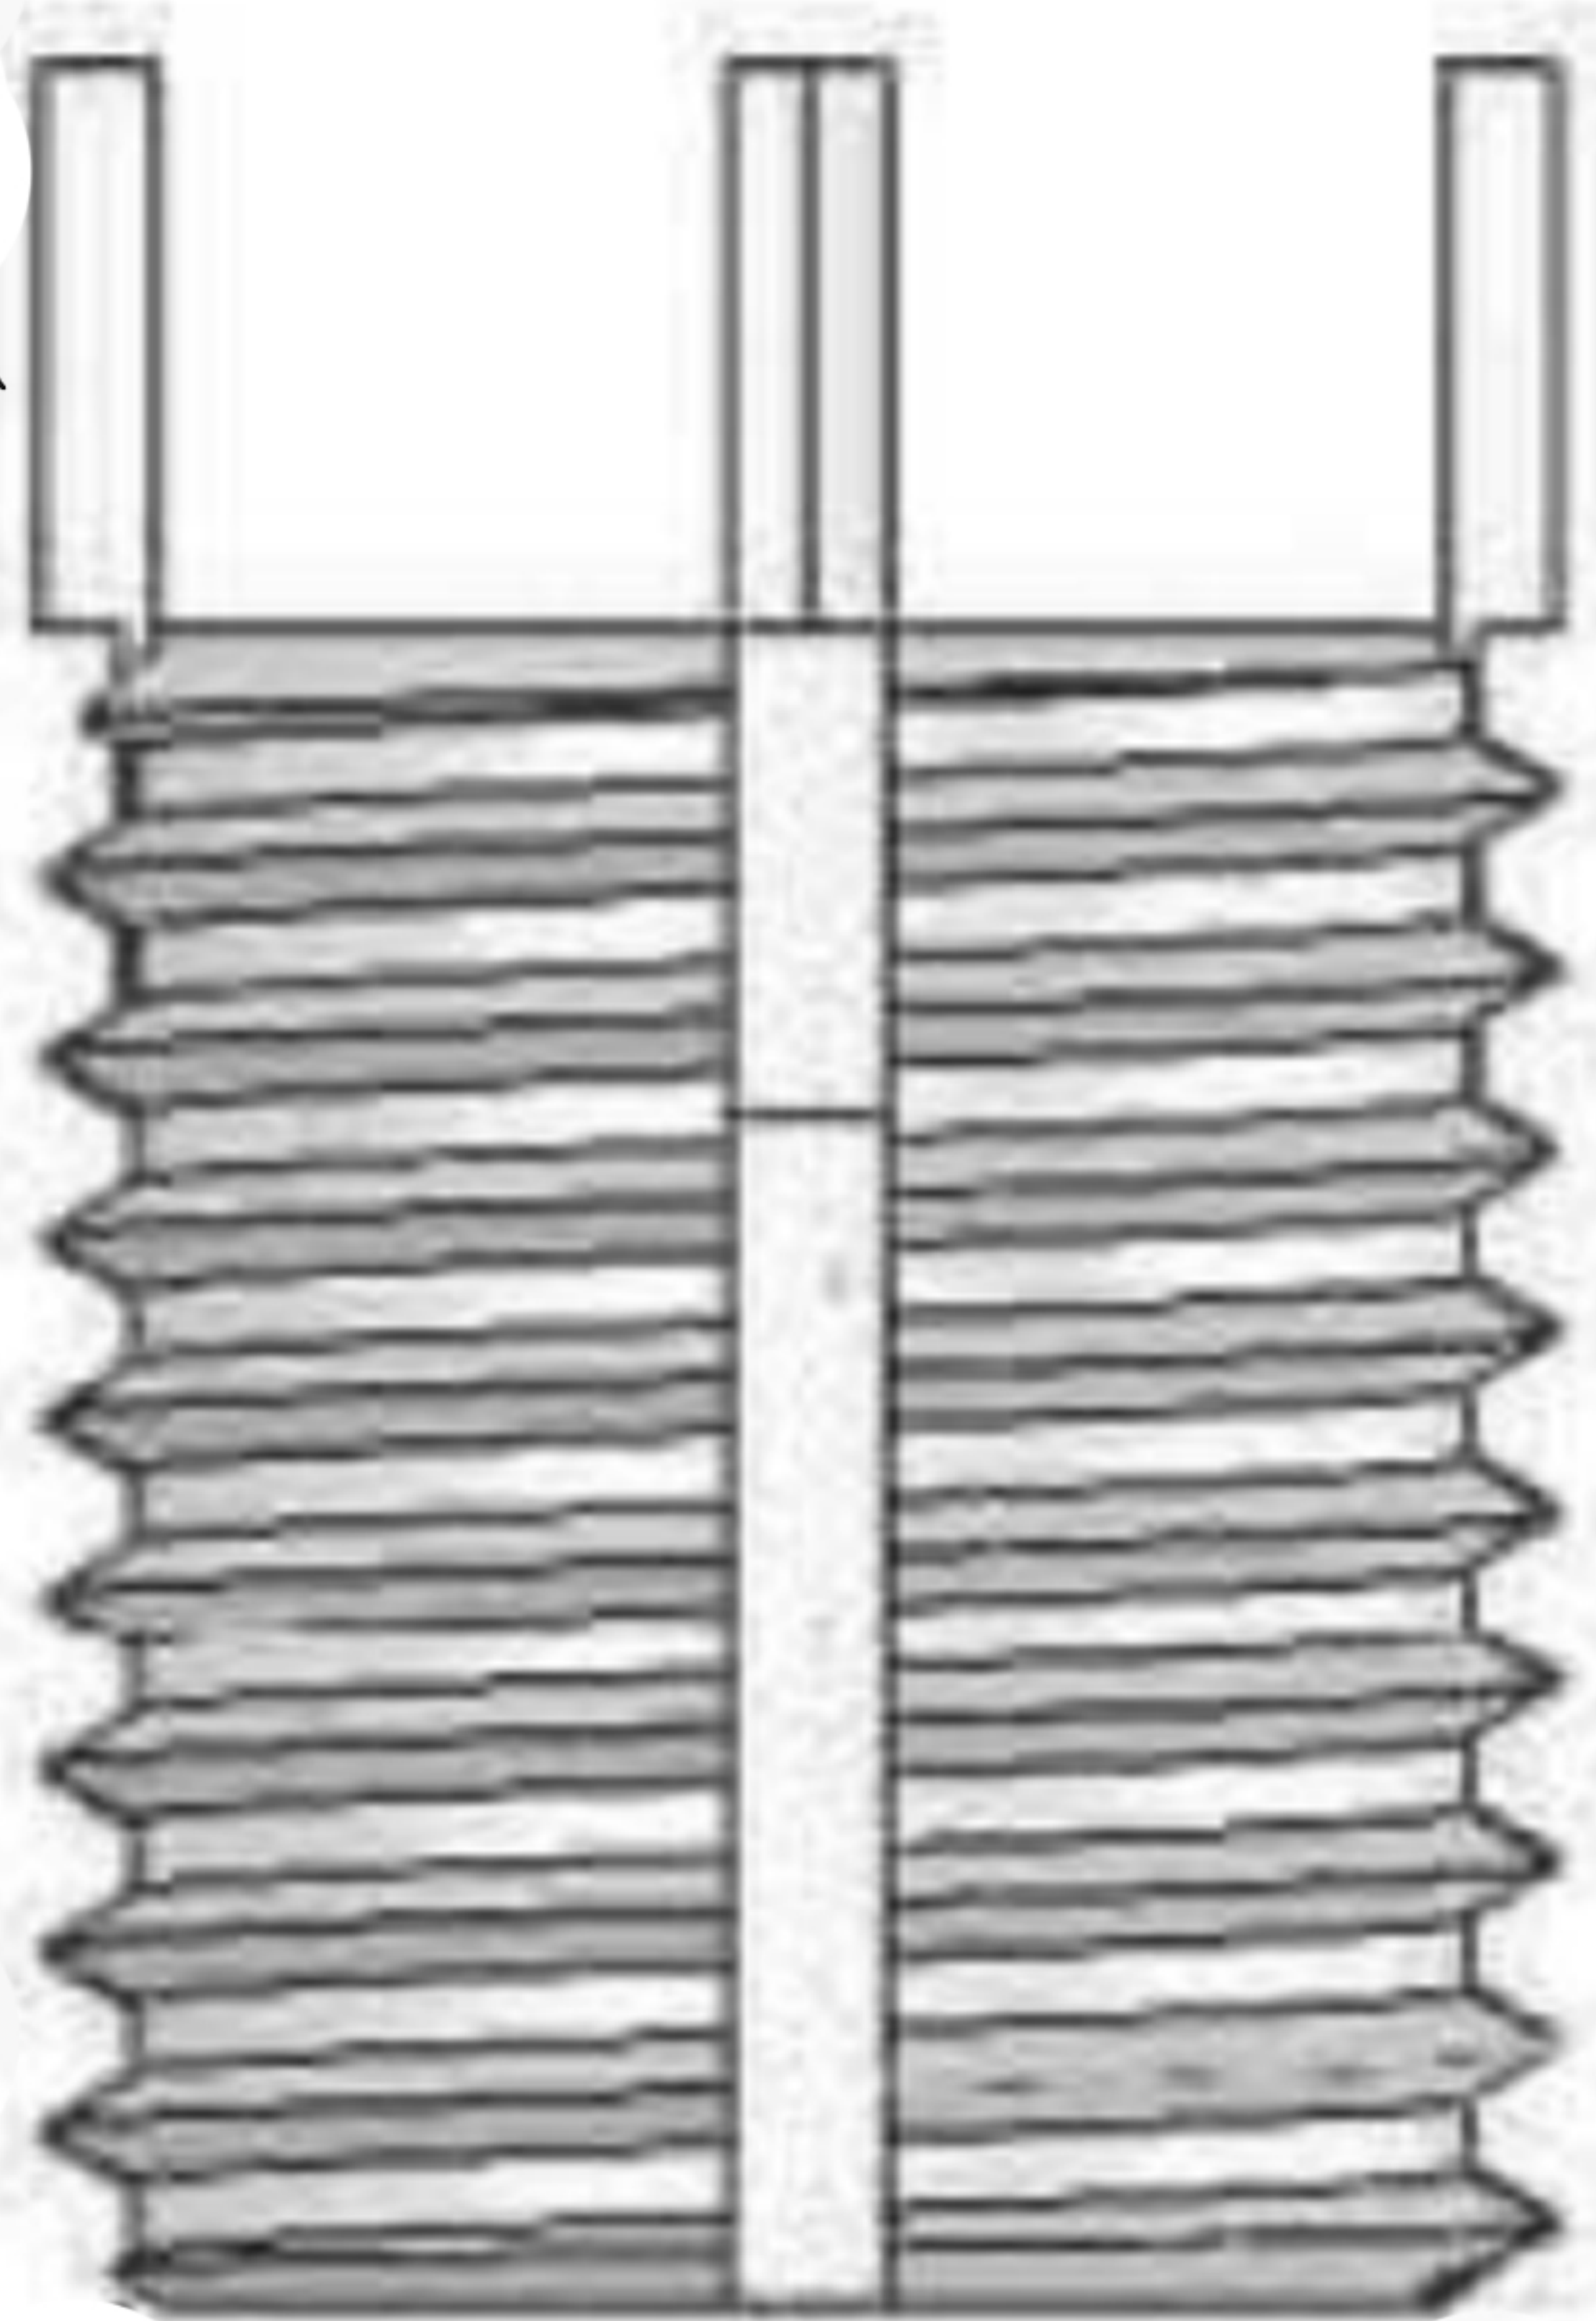

1.375

Suggested Drill Bit Size



1.3125 (1-5/16)

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

		NAME	DATE
		DRAWN	
		CHECKED	
		ENG APPR.	
		MFG APPR.	
		Q.A.	
		COMMENTS:	
NEXT ASSY	USED ON		
APPLICATION		DO NOT SCALE DRAWING	

TH. STANDARD: ANSI/ASME  
ACRONYM: UNF  
ROTATION: Right-Hand  
MATERIAL FINISH  
Stainless Steel Type 303  
PART NUMBER  
35L8C-65UU-137



**17-B KENTUCKY AVENUE  
PATERSON, NEW JERSEY 07503  
TEL: 973-684-4010 FAX: 973-684-3095  
email: TechSupport@industrialhardware.com  
www.industrialhardware.com**

SIZE <b>A</b>	DWG. NO.	REV.
SCALE:1:8	WEIGHT:	SHEET 1 OF 1