



1. Prepare Finished Opening

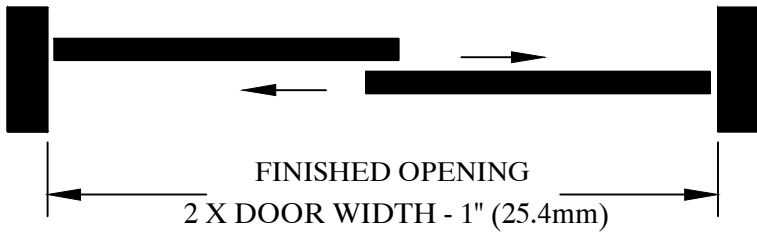

2. Install Track & Rollers

Fascia track should be installed with no gap.
Rollers must be inserted before track is mounted.


3. Mount Door Plates

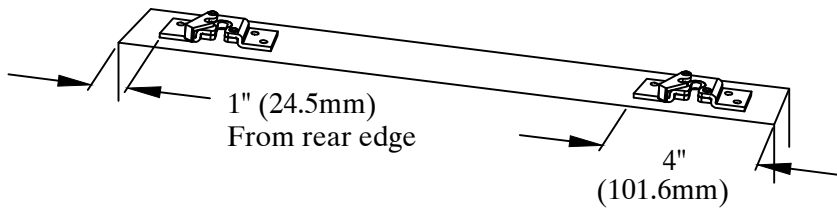


Note: Plates may be off center.
See chart on back.

4. Hang and Adjust Door:


Attach door to rollers, Swing hanger into place.
Turn adjusting bolt for height and plumb adjustments.



5. Install Door Guide, Stops and Pulls.

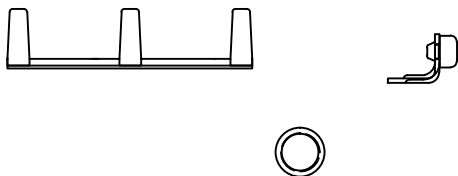

Two Door Installation
with Door Stop




8493-HQR FRONT
8/10



CLOSET DOOR HARDWARE
HAGER HINGE CO. St. Louis, Mo. 63104 U.S.A.
(314) 772-4400


1. Prepare Finished Opening

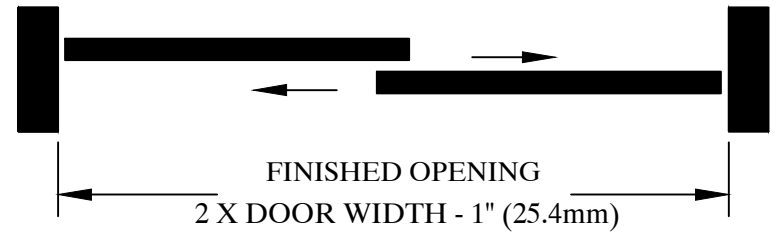

2. Install Track & Rollers

Fascia track should be installed with no gap.
Rollers must be inserted before track is mounted.


3. Mount Door Plates

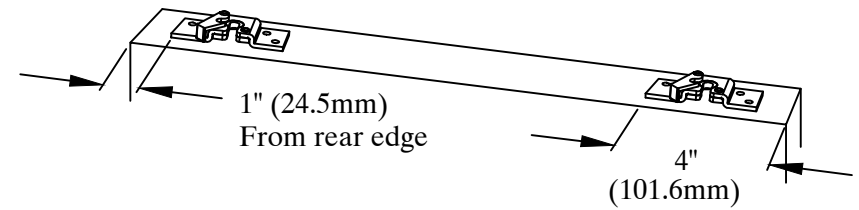


Note: Plates may be off center.
See chart on back.

4. Hang and Adjust Door:


Attach door to rollers, Swing hanger into place.
Turn adjusting bolt for height and plumb adjustments.



5. Install Door Guide, Stops and Pulls.

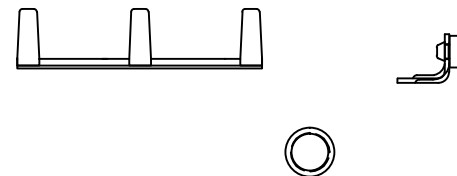

Two Door Installation
with Door Stop




8493-HQR FRONT
8/10




CLOSET DOOR HARDWARE
HAGER HINGE CO. St. Louis, Mo. 63104 U.S.A.
(314) 772-4400

INSTALLATION INSTRUCTIONS

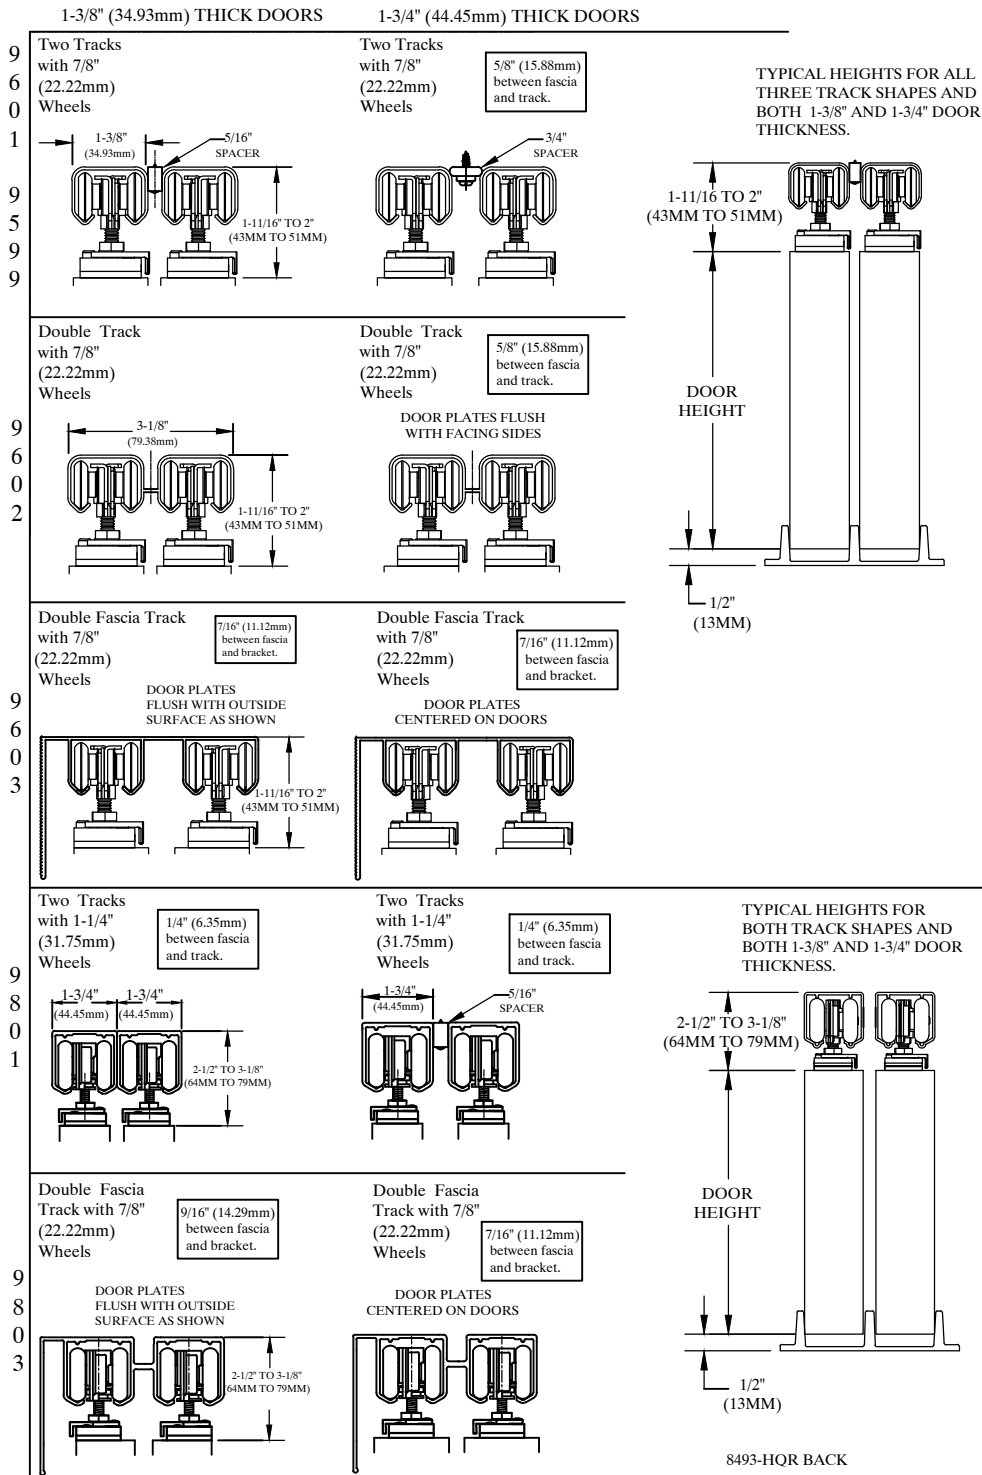

FLOOR CLEARANCE: Allow 1/2" (12.7mm) between door and finished floor.

INSTALLATION INSTRUCTIONS

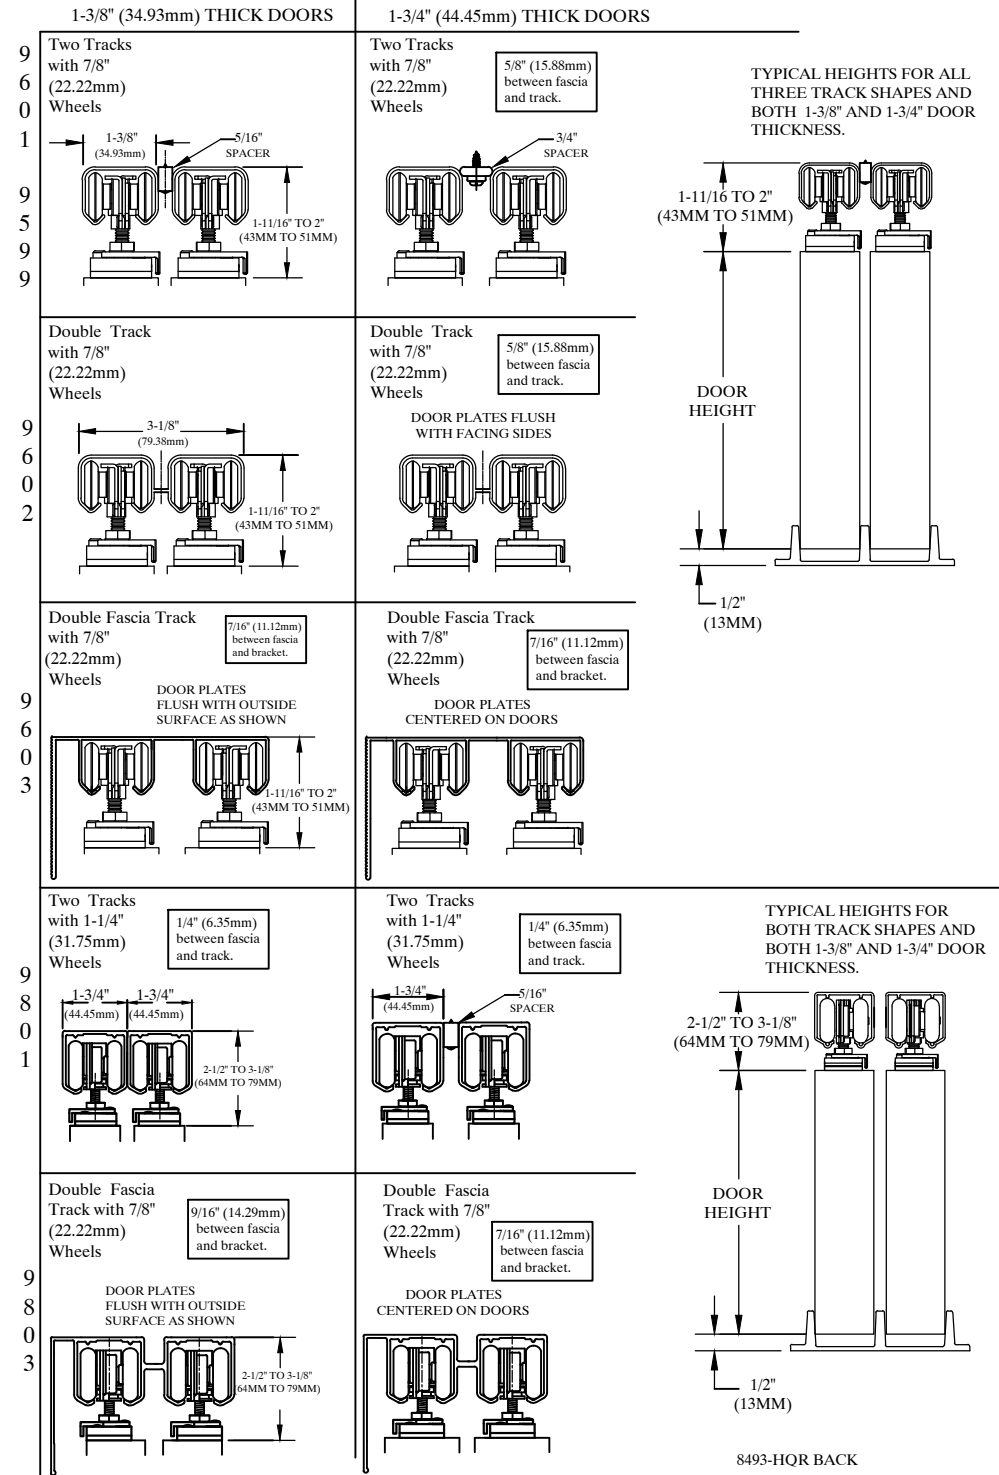

FLOOR CLEARANCE: Allow 1/2" (12.7mm) between door and finished floor.